


1	Type	Low Distortion Lens
2	Resolution	MP
3	Image Format	1/2.7"
4	Image Circle	φ7.0mm(MAX)
5	EFL	2.96mm
6	TTL	15.75mm
7	F/NO.	5.6
8	FFL (M)	3.22mm
9	BFL (O)	3.26mm
10	For Sensor	AR0135
11	F.O.V	Horizontal 77°
12		Vertical 62°
13		Diagonal 90°
14	TV Distortion	<-1%
15	Relative Ill.	>60%
16	Chief Ray Angle	<15.6°
17	M.O.D	0.1m~∞
18	Mount Type	M12*P0.5
19	Dimension Figure	φ14.0*L12.53mm
20	Lens Structure	4G2P(PM)
21	IR-Filter	T=50%&IR650±10nm
22	Waterproof	No
23	Weight	4.6g
24	Iris Operation	Fixed
25	Zoom Operation	Fixed
26	Focus Operation	Manual
27	Operating Temperature	-20° ~+85°
28	Storage Temperature	-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2019-05-22	CH3559JB Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2018-05-26	
	X.000	±0.001	Checked	Anna	2018-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2018-07-20	

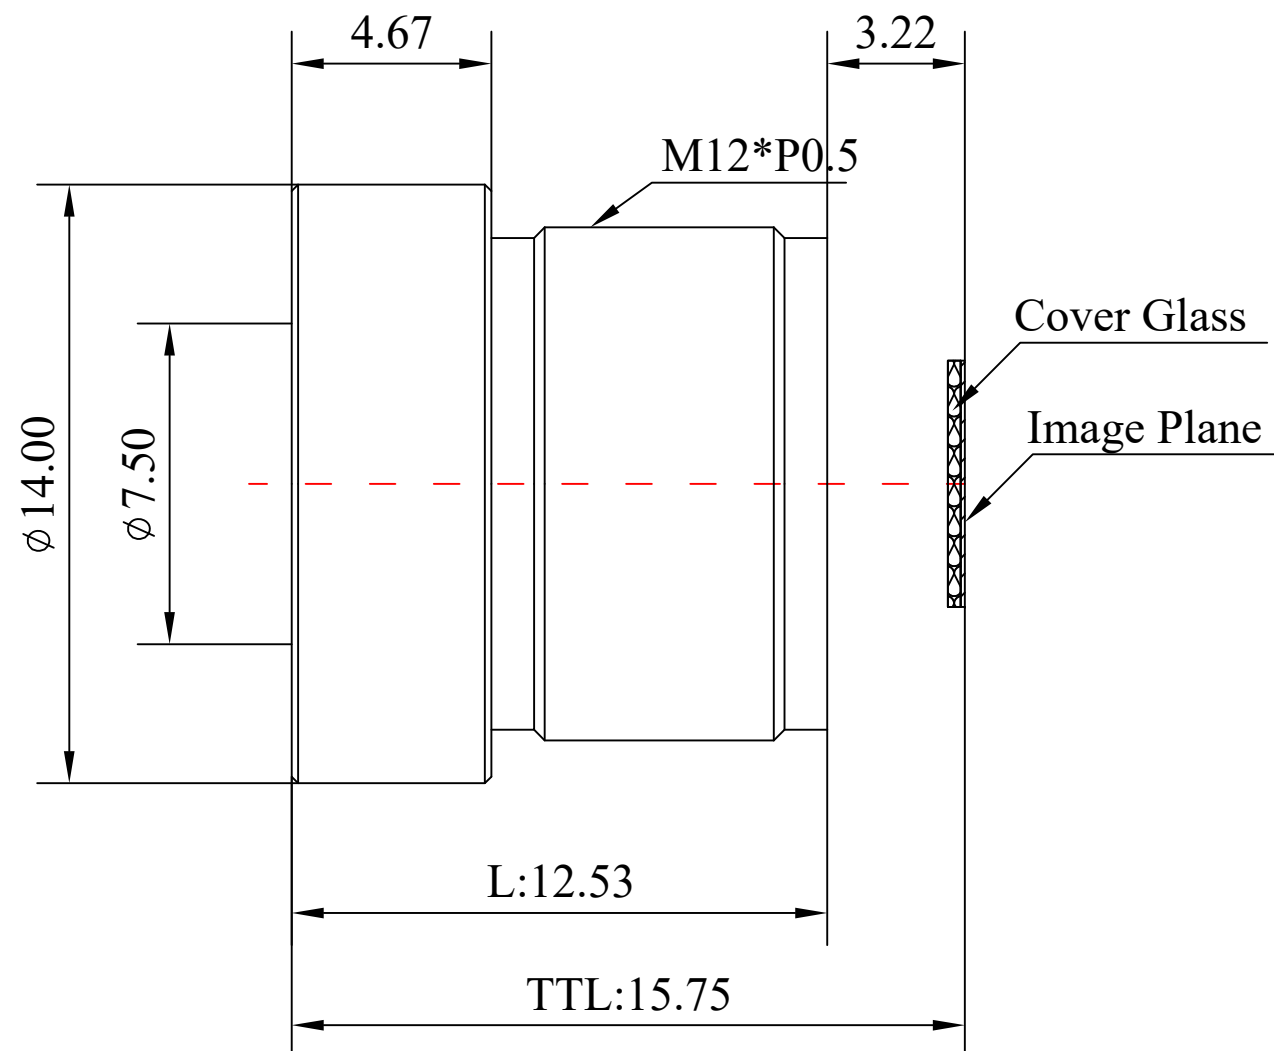