


1	Type	Machine vision
2	EFL	8.5mm
3	F.NO	1.4~22
4	Resolution	5MP
5	Image Format	2/3"
6	FFL (M)	17.53
7	ML	77.23~79.99
8	F.O.V (H*V*D)	2/3" 57.2°*43.4°*70.3
9		1/2" 42.1°*31.8°*52.2°
10		1/3" 31.8°*23.9°*39.5°
11	TV Distortion	<1.66%
12	M.O.D	0.25m~∞
13	Mount Type	C/CS
14	Dimension Figure	φ34.8*L69.1mm
15	Filter Size	UV M30*P0.5
16	Weight	128g
17	Iris Operation	Manual
18	Zoom Operation	Fixed
19	Focus Operation	Manual
20	Operating Temperature	-20° +85°
21	Storage Temperature	-20° +85°



Scale	Remark	Tolerances	Date	Revsied		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
1.5 : 1	X	±0.2	2017-11-26	3569A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2017-09-03	
	X.000	±0.001	Checked	Anna	2017-09-23	
mm	Angle	±0.5°	Approval	Sanmu	2017-10-18	

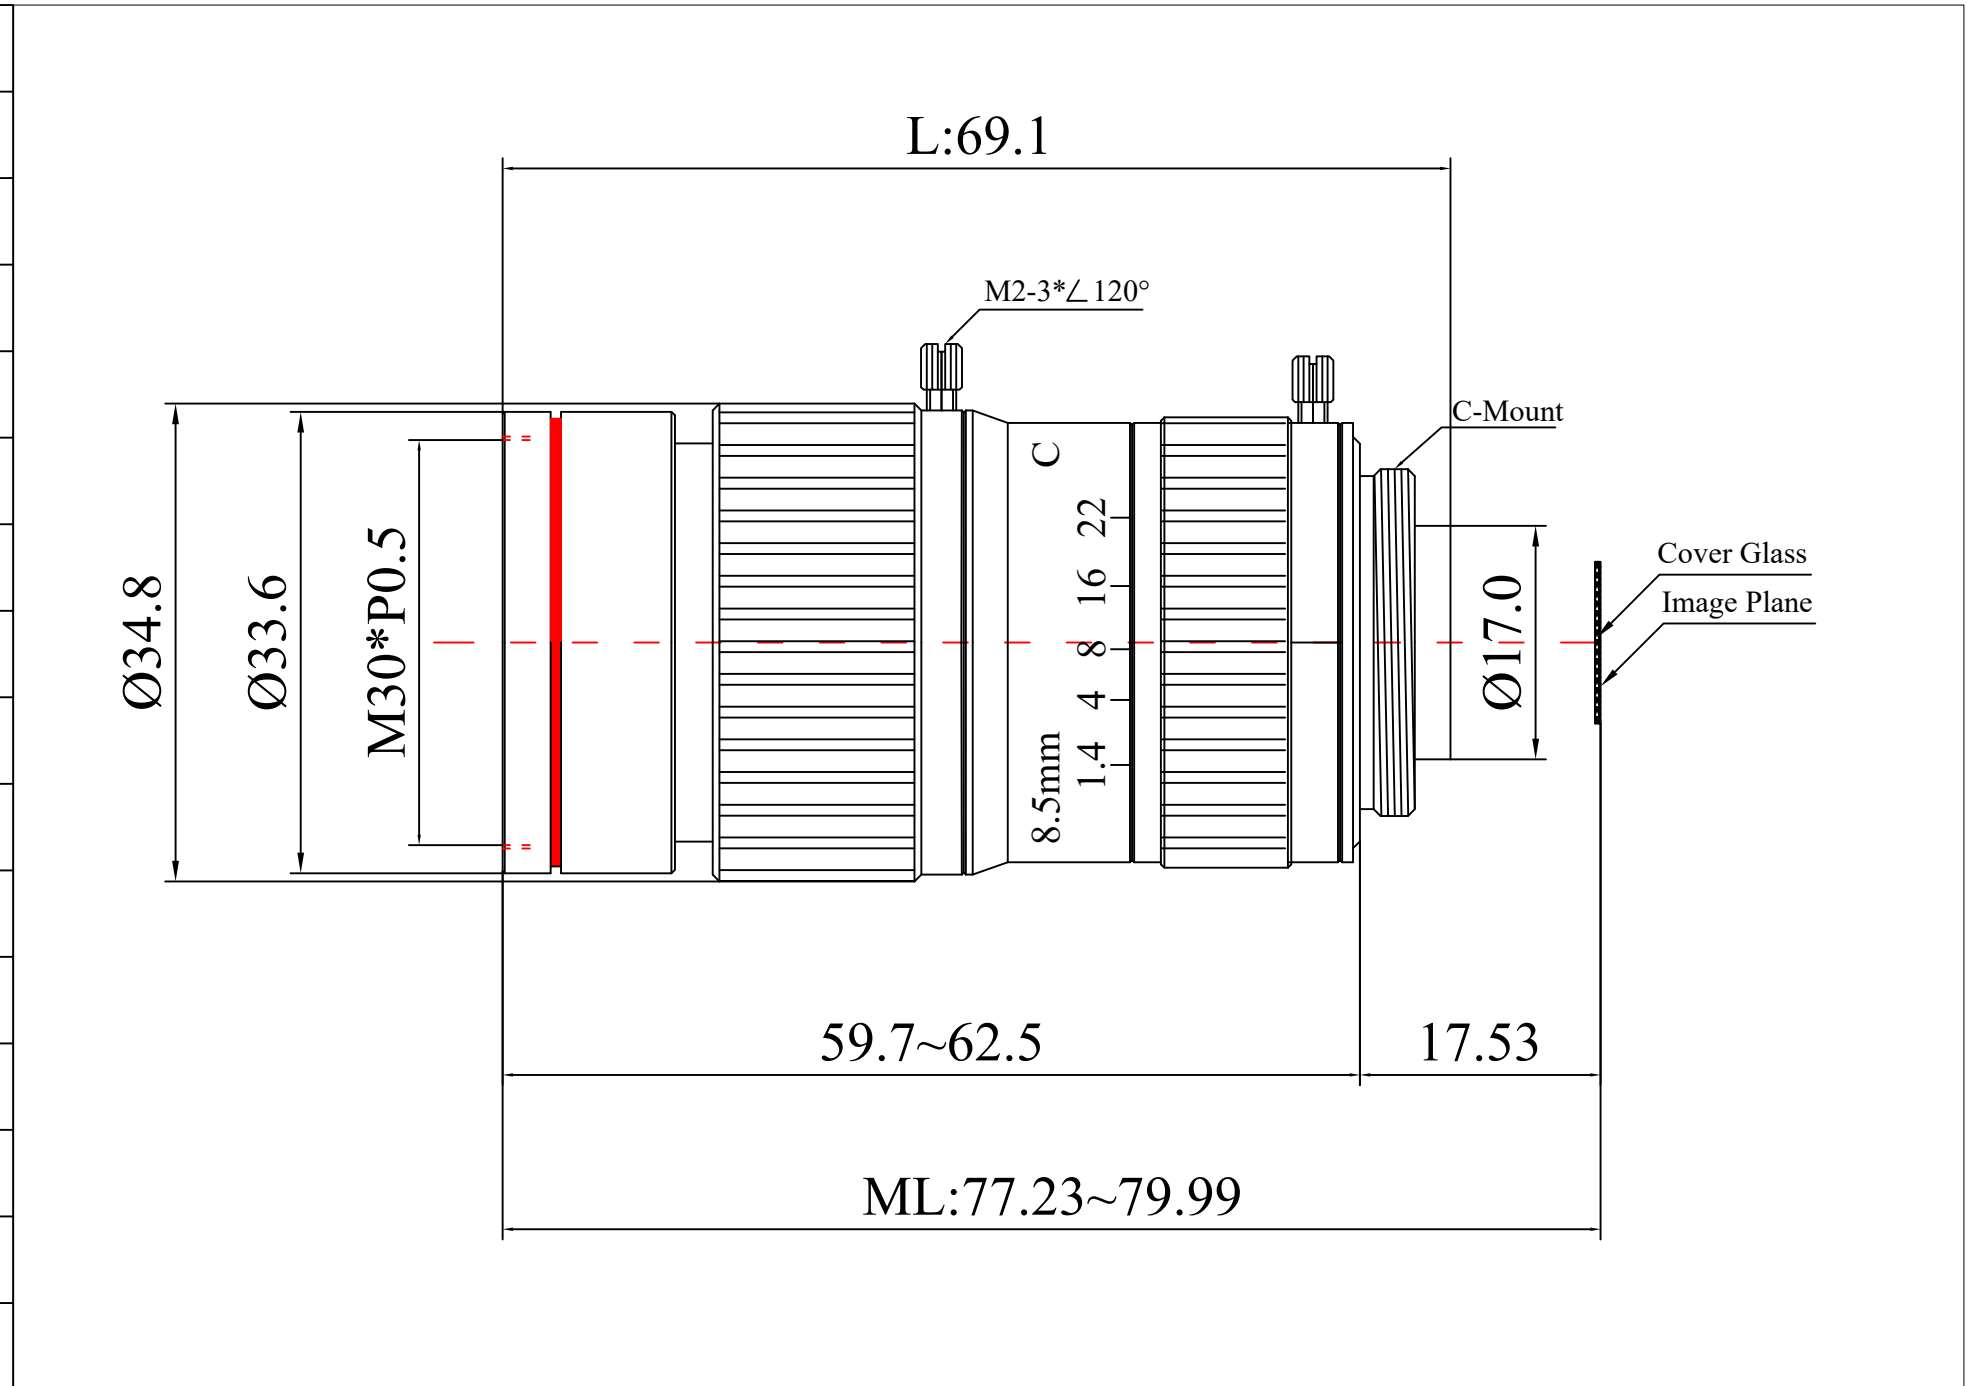