
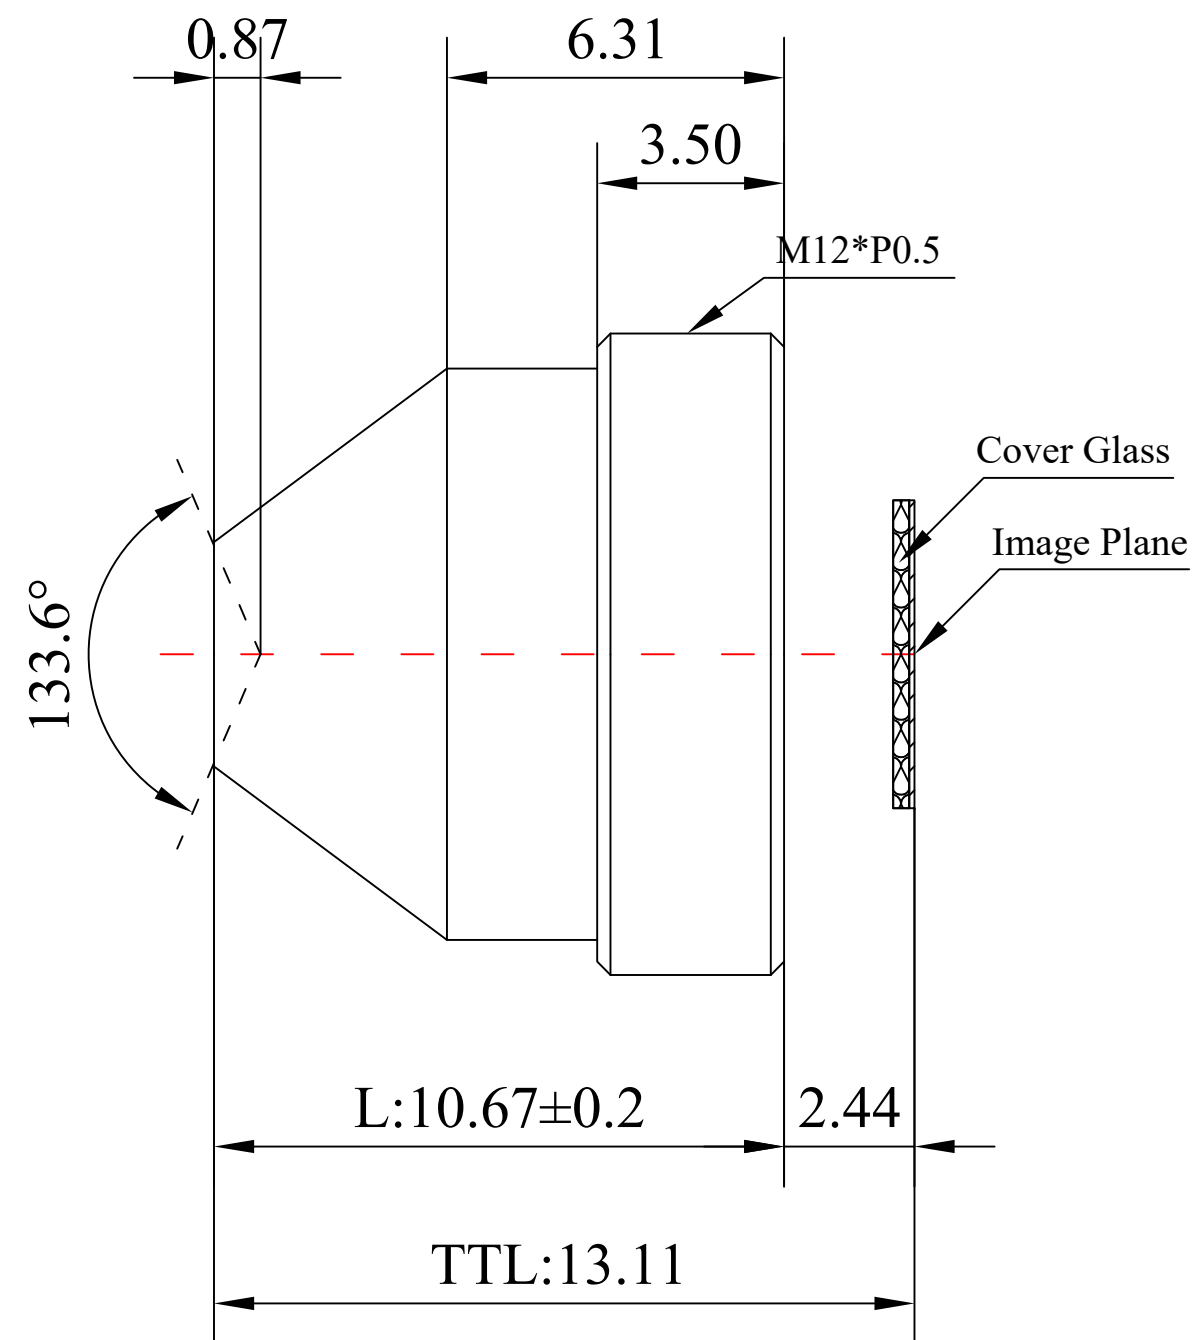


1	Type	Pinhole Lens		
2	Resolution	MP		
3	Image Format	1/2.7"		
4	Image Circle	φ6.8mm(MAX)		
5	EFL	2.8mm		
6	TTL	13.11mm		
7	F/NO.	2.2		
8	FFL (M)	2.44mm		
9	BFL (O)	2.60mm		
10	For Sensor	OV2710	OV4689	
11	F.O.V	Horizontal	110°	100.7°
12		Vertical	56.6°	52.8°
13		Diagonal	133.6°	121°
14	OPT Distortion	<-58%		
15	Relative Ill.	>46%		
16	Chief Ray Angle	<-12.3°		
17	M.O.D	0.1m~∞		
18	Mount Type	M12*P0.5		
19	Dimension Figure	φ12.0*L10.67mm		
20	Lens Structure	4G1P		
21	IR-Filter	T=50%&IR650±10nm		
22	Waterproof	No		
23	Weight	2.2g		
24	Iris Operation	Fixed		
25	Zoom Operation	Fixed		
26	Focus Operation	Manual		
27	Operating Temperature	-20° ~+85°		
28	Storage Temperature	-20° ~+85°		

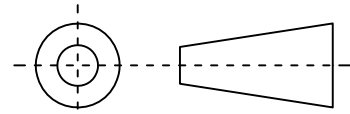

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
5:1	X	±0.2	2019-12-17	CH3627A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2019-09-03	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2019-10-25	
mm	Angle	±0.5°	Approval	Sanmu	2019-12-17	