
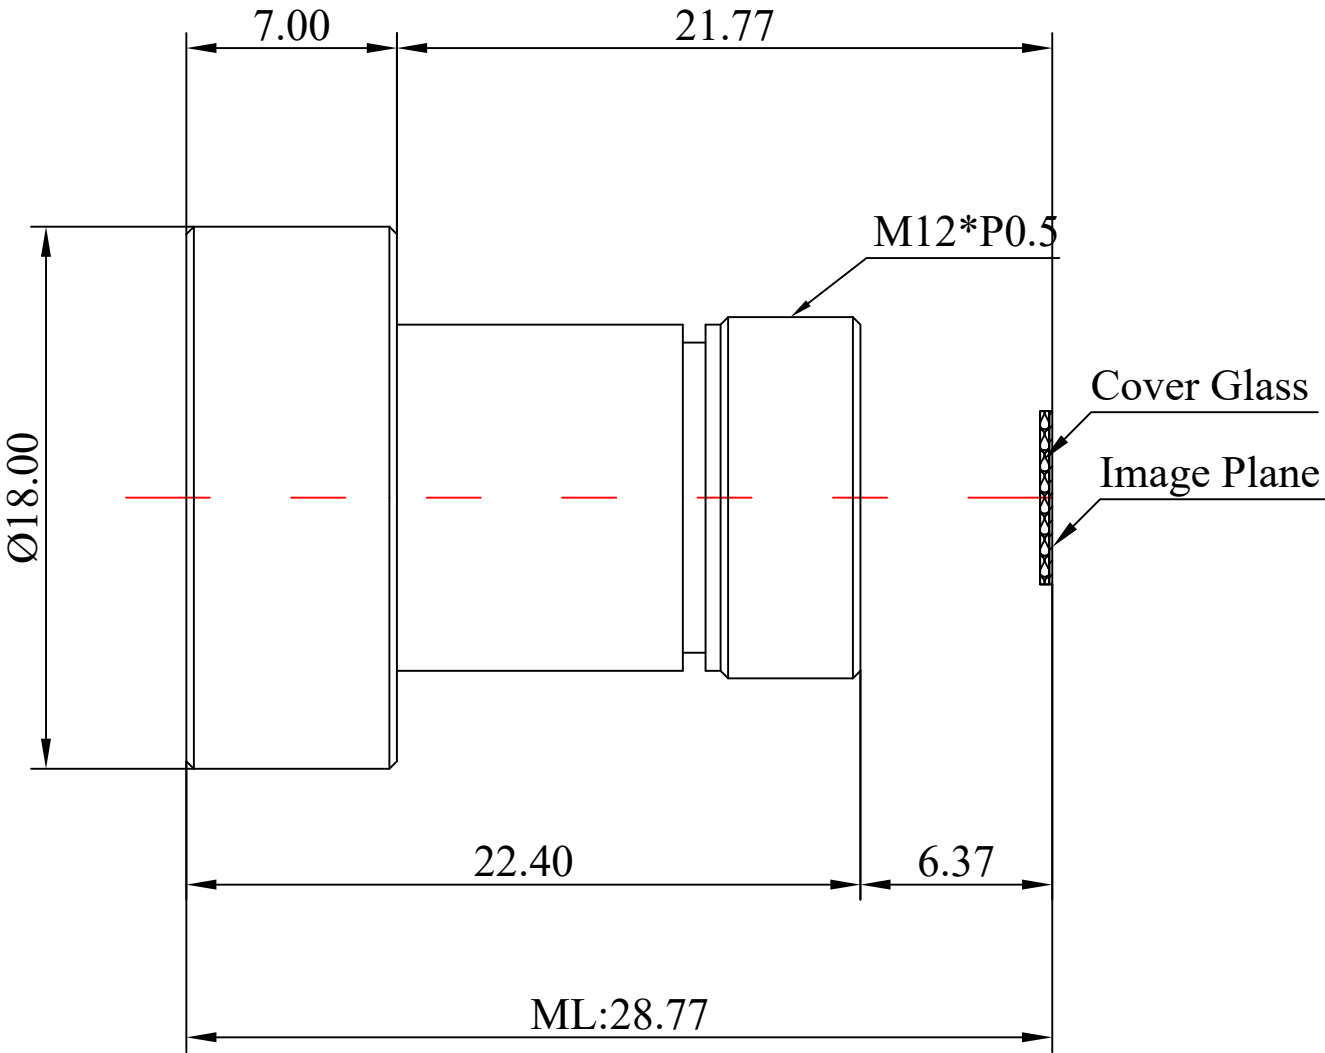


1	Type		Low Distortion Lens	
2	Resolution		12MP	
3	Image Format		1/1.7"	
4	Image Circle		φ9.5mm(MAX)	
5	EFL		8.0mm	
6	TTL		28.0mm	
7	F/NO.		F5.6	
8	FFL (M)		6.37mm	
9	BFL (O)		7.80mm	
10	For Sensor		1/1.7"	
11	F.O.V	Horizontal	49.31°	
12		Vertical	37.98°	
13		Diagonal	60.32°	
14	Distortion		OPT <-0.96%	TV<-0.37%
15	Relative Ill.		>74.7%	
16	Chief Ray Angle		<18°	
17	M.O.D		0.05m~∞	
18	Mount Type		M12*P0.5	
19	Dimension Figure		φ18.00*L22.40mm	
20	Lens Structure		10G	
21	IR-Filter		Non-IR	
22	Waterproof		No	
23	Weight		---	
24	Iris Operation		Fixed	
25	Zoom Operation		Fixed	
26	Focus Operation		Manual	
27	Operating Temperature		-20° ~+85°	
28	Storage Temperature		-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2020-05-14	CH3677A Rev1.0		
	4:1	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2020-03-13	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2020-04-09	
mm	Angle	±0.5°	Approval	Sanmu	2020-04-19	