
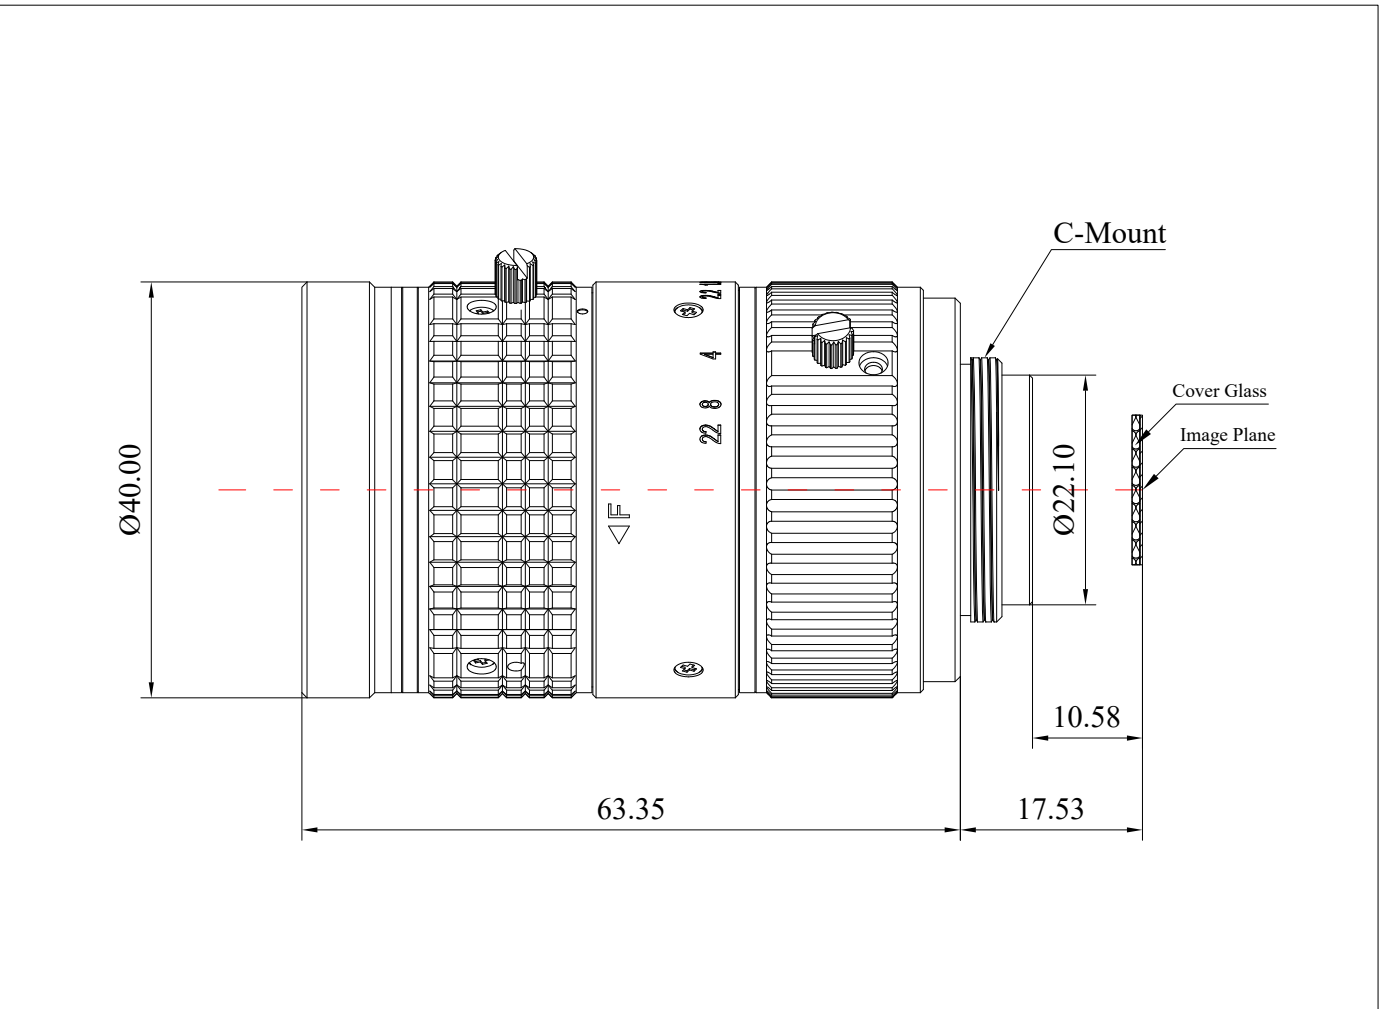


1	Type	ITS Lens			
2	Resolution	12MP			
3	Image Format	1"			
4	Image Circle	φ16mm(MAX)			
5	EFL	16mm			
6	Flange BFL	17.53mm			
7	F/NO.	F1.4			
8	FFL (M)	10.58mm			
9	BFL (O)	17.53mm			
10	For Sensor	1"	2/3"	1/2"	
11	F.O.V	Horizontal	45.3°	31.5°	23°
12		Vertical	34.3°	23.7°	17.3°
13		Diagonal	55.6°	39.2°	28.65°
14	OPT Distortion	<-3.95%			
15	Relative Ill.	---			
16	Chief Ray Angle	<7.79°			
17	M.O.D	0.3m~∞			
18	Mount Type	C-Mount			
19	Dimension Figure	φ40*L63.35mm			
20	Lens Structure	---			
21	IR-Filter	---			
22	IR-Correction	Yes			
23	Weight	---			
24	Iris Operation	Manual			
25	Zoom Operation	Fixed			
26	Focus Operation	Manual			
27	Operating Temperature	-20° ~+85°			
28	Storage Temperature	-20° ~+85°			



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2020-05-14	CH3683B Rev1.0		
Units	X.00	±0.10	Design	Linda	2018-03-13	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2018-04-09	
mm	Angle	±0.5°	Approval	Sanmu	2018-04-19	