


1	Type	ToF Lens	
2	Resolution	MP	
3	Image Format	1/4"	
4	Image Circle	φ5.0mm(MAX)	
5	EFL	2.16mm	
6	TTL	13.1mm	
7	F/NO.	F1.2	
8	FFL (M)	2.62mm	
9	BFL (O)	2.67mm	
10	For Sensor	MN34906	
11	F.O.V	Horizontal	84.4°
12		Vertical	65.3°
13		Diagonal	103.3°
14	TV Distortion	<-6.0%	
15	Relative Ill.	>60%	
16	Chief Ray Angle	<13°	
17	M.O.D	0.1m~∞	
18	Mount Type	M12*P0.5	
19	Dimension Figure	φ14.0*L10.48mm	
20	Lens Structure	1G3P	
21	IR-Filter	Non-IR	
22	Waterproof	---	
23	Weight	---	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-20° ~+85°	
28	Storage Temperature	-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2021-06-03	CH3727A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2021-03-26	
	X.000	±0.001	Checked	Anna	2021-04-22	
mm	Angle	±0.5°	Approval	Sanmu	2021-05-16	

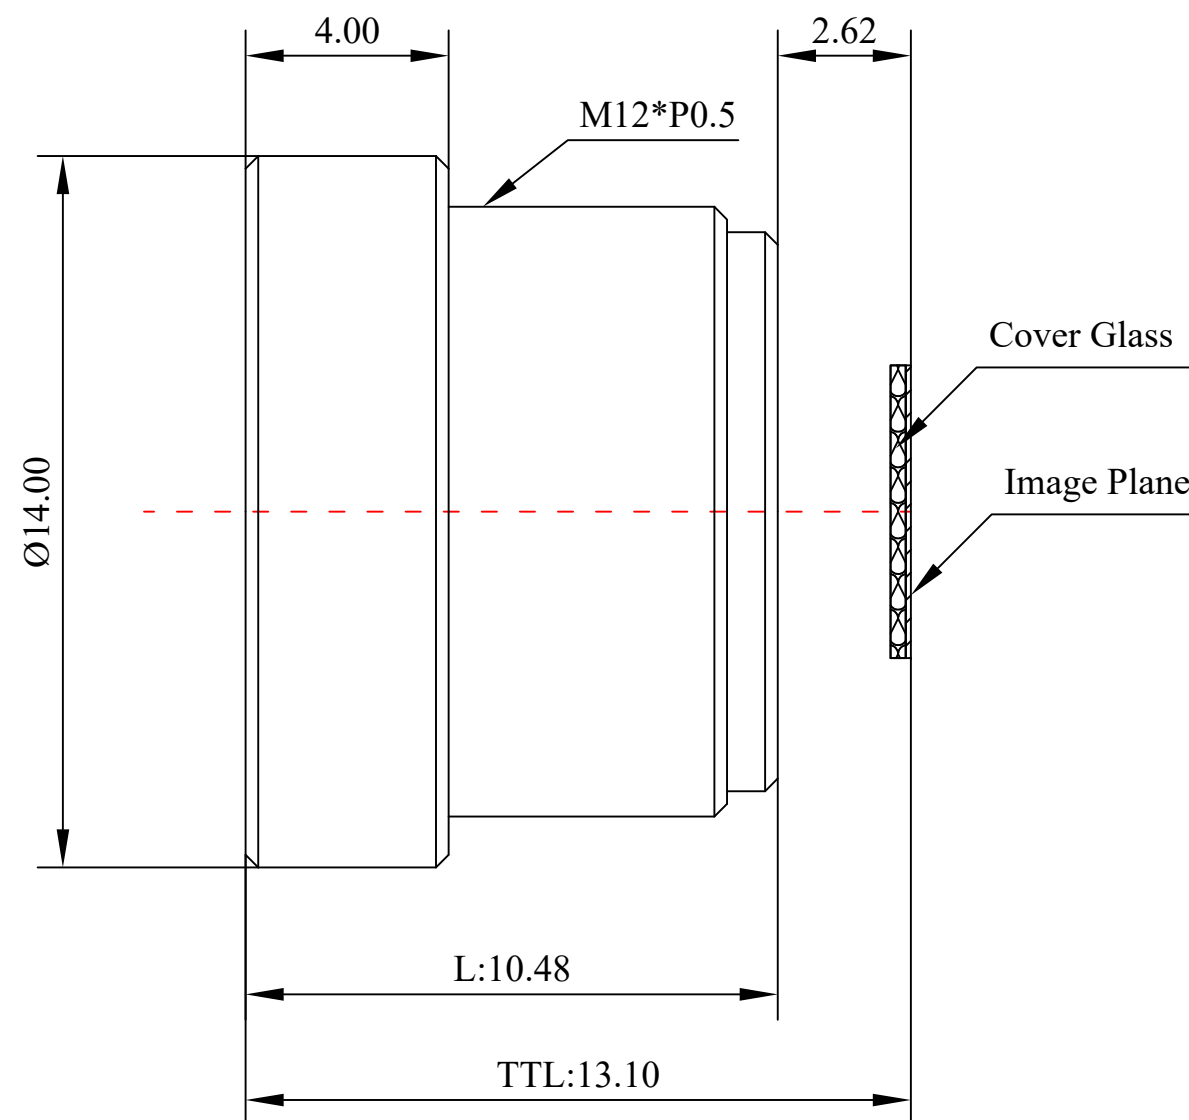