


| | | | |
|----|-----------------------|------------------|--------|
| 1 | Type | Wide Angle Lens | |
| 2 | Resolution | MP | |
| 3 | Image Format | 1/2.7" | |
| 4 | Image Circle | φ6.8mm(MAX) | |
| 5 | EFL | 3.65mm | |
| 6 | TTL | 17.97mm | |
| 7 | F/NO. | 2.2 | |
| 8 | FFL (M) | 3.22mm | |
| 9 | BFL (O) | 6.05mm | |
| 10 | For Sensor | 1/2.7" | |
| 11 | F.O.V | Horizontal | 99.6° |
| 12 | | Vertical | 51.8° |
| 13 | | Diagonal | 121.2° |
| 14 | TV Distortion | <-9.2%(H) | |
| 15 | Relative Ill. | >80% | |
| 16 | Chief Ray Angle | <23° | |
| 17 | M.O.D | 0.1m~∞ | |
| 18 | Mount Type | M12*P0.5 | |
| 19 | Dimension Figure | φ14.00*L14.75mm | |
| 20 | Lens Structure | 5G | |
| 21 | IR-Filter | T=50% & 650±10nm | |
| 22 | Waterproof | No | |
| 23 | Weight | 4.4g | |
| 24 | Iris Operation | Fixed | |
| 25 | Zoom Operation | Fixed | |
| 26 | Focus Operation | Manual | |
| 27 | Operating Temperature | -20° ~+85° | |
| 28 | Storage Temperature | -20° ~+85° | |



| Scale | Remark | Tolerances | Date | Revised | | 福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD |
|-------|--------|------------|------------|---------------|------------|---|
| 5 : 1 | X | ±0.2 | 2019-07-03 | CH379A Rev1.0 | | |
| | X.0 | ±0.15 | | | | |
| Units | X.00 | ±0.10 | Design | Linda | 2017-07-26 | |
| | X.000 | ±0.001 | Checked | Anna | 2017-08-31 | |
| mm | Angle | ±0.5° | Approval | Sanmu | 2017-09-02 | |

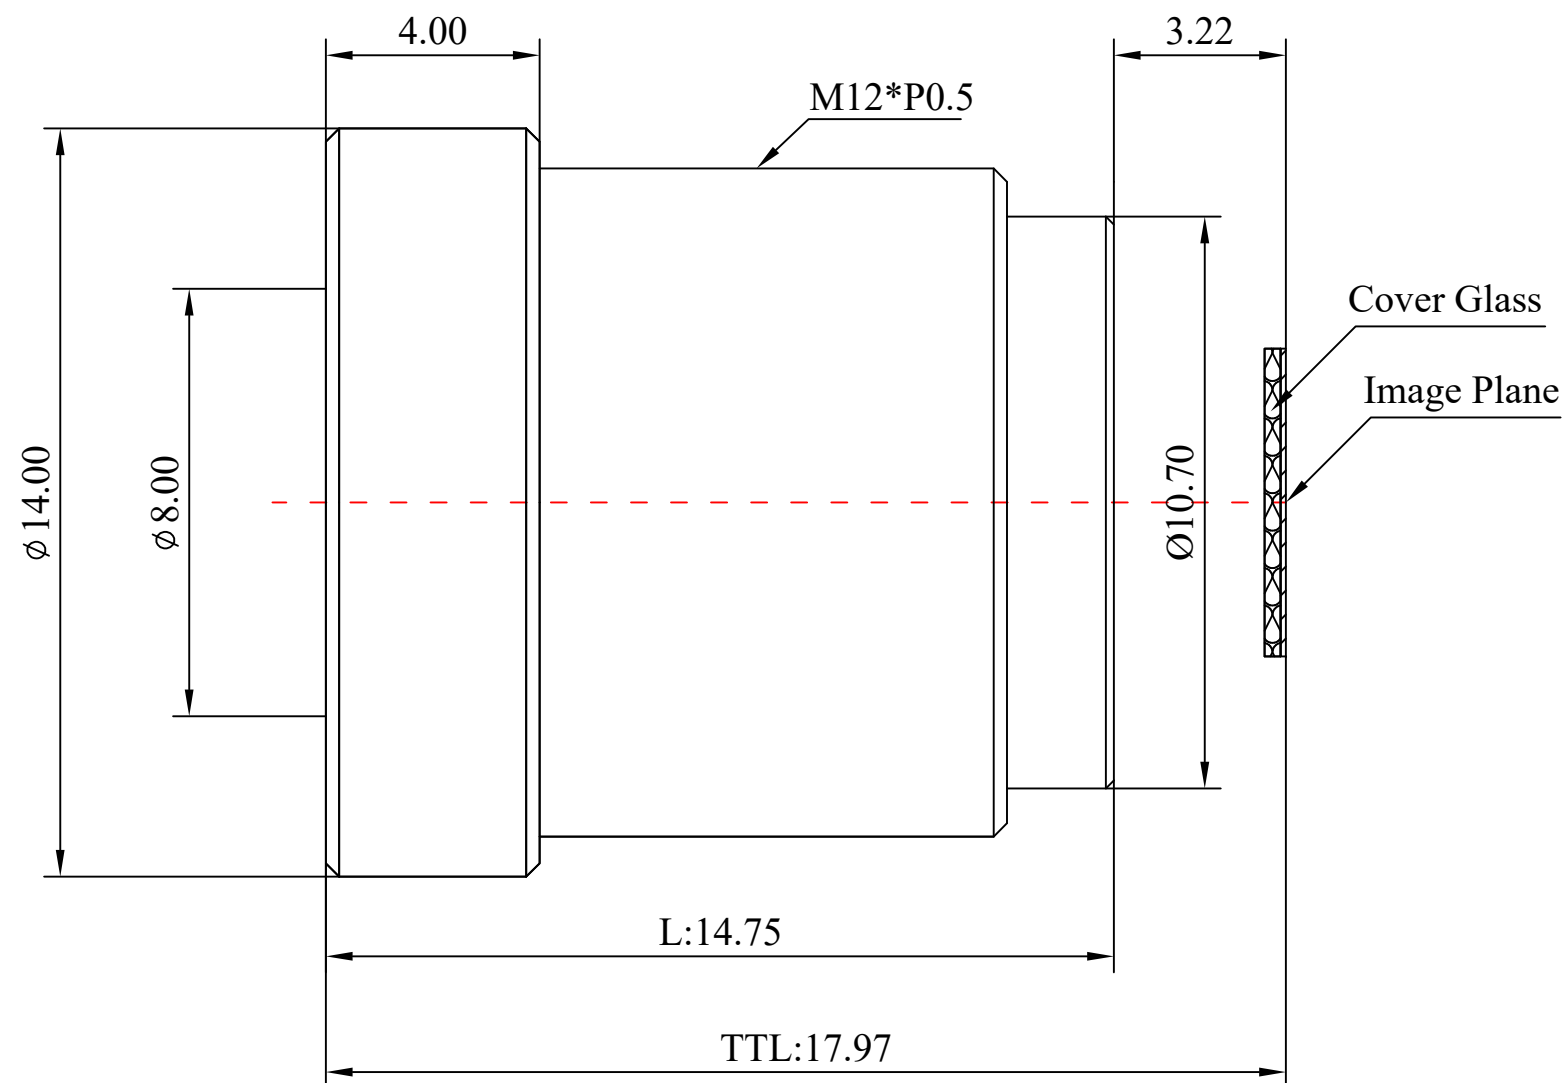