
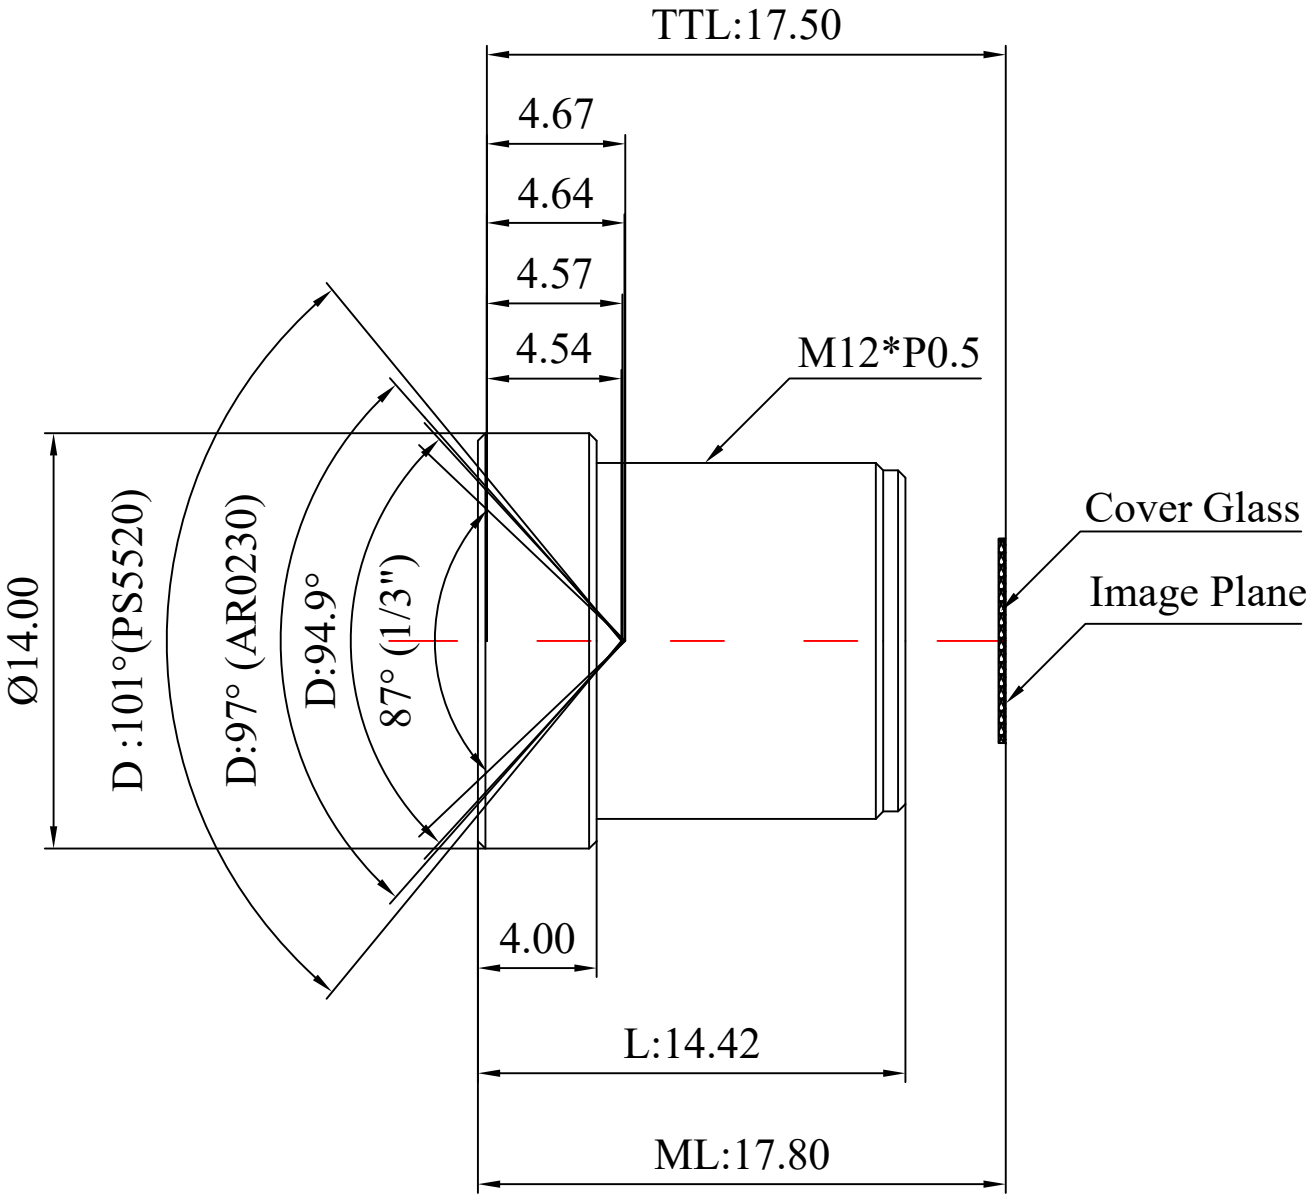


1	Type		Low Distortion Lens					
2	Resolution		5MP					
3	Image Format		1/2.9"					
4	Image Circle		φ7.0mm(MAX)					
5	EFL		3.0mm					
6	TTL		17.5mm					
7	F/NO.		F2.4					
8	FFL (M)		3.38mm					
9	BFL (O)		4.80mm					
10	For Sensor	1/2.5"	1/2.7"	1/2.8"	1/2.9"	1/3"	1/4"	
11	F.O.V	H	88°	89°	86.8°	84°	74°	62.7
12		V	71°	57°	55.4°	53°	59°	49°
13		D	101°	97°	94.9°	93°	87°	74.8°
14	TV Distortion	<-0.96%	<-0.95%	<-0.92%	<-0.90%	<-0.8%	<-0.5%	
15	Relative Ill.	>46.3%	>53%	>55.7%	>58%	>65%	>76.5%	
16	C.R.A	<20.3°	<18.6°	<17.7°	<17°	<15.2°	<11.9°	
17	M.O.D		0.1m~∞					
18	Mount Type		M12*P0.5					
19	Dimension Figure		φ14.0*L14.42mm					
20	Lens Structure		5E					
21	IR-Filter		Non-IR					
22	Weight		---					
23	Iris Operation		Fixed					
24	Zoom Operation		Fixed					
25	Focus Operation		Manual					
26	Operating Temperature		-20° ~+85°					
27	Storage Temperature		-20° ~+85°					



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	± 0.2	2022-07-29	CH3804A Rev1.0		
4: 1	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2022-03-19	 3D Angle Projection
	X.000	± 0.001	Checked	Anna	2022-04-12	
mm	Angle	± 0.5 °	Approval	Sanmu	2022-05-17	