
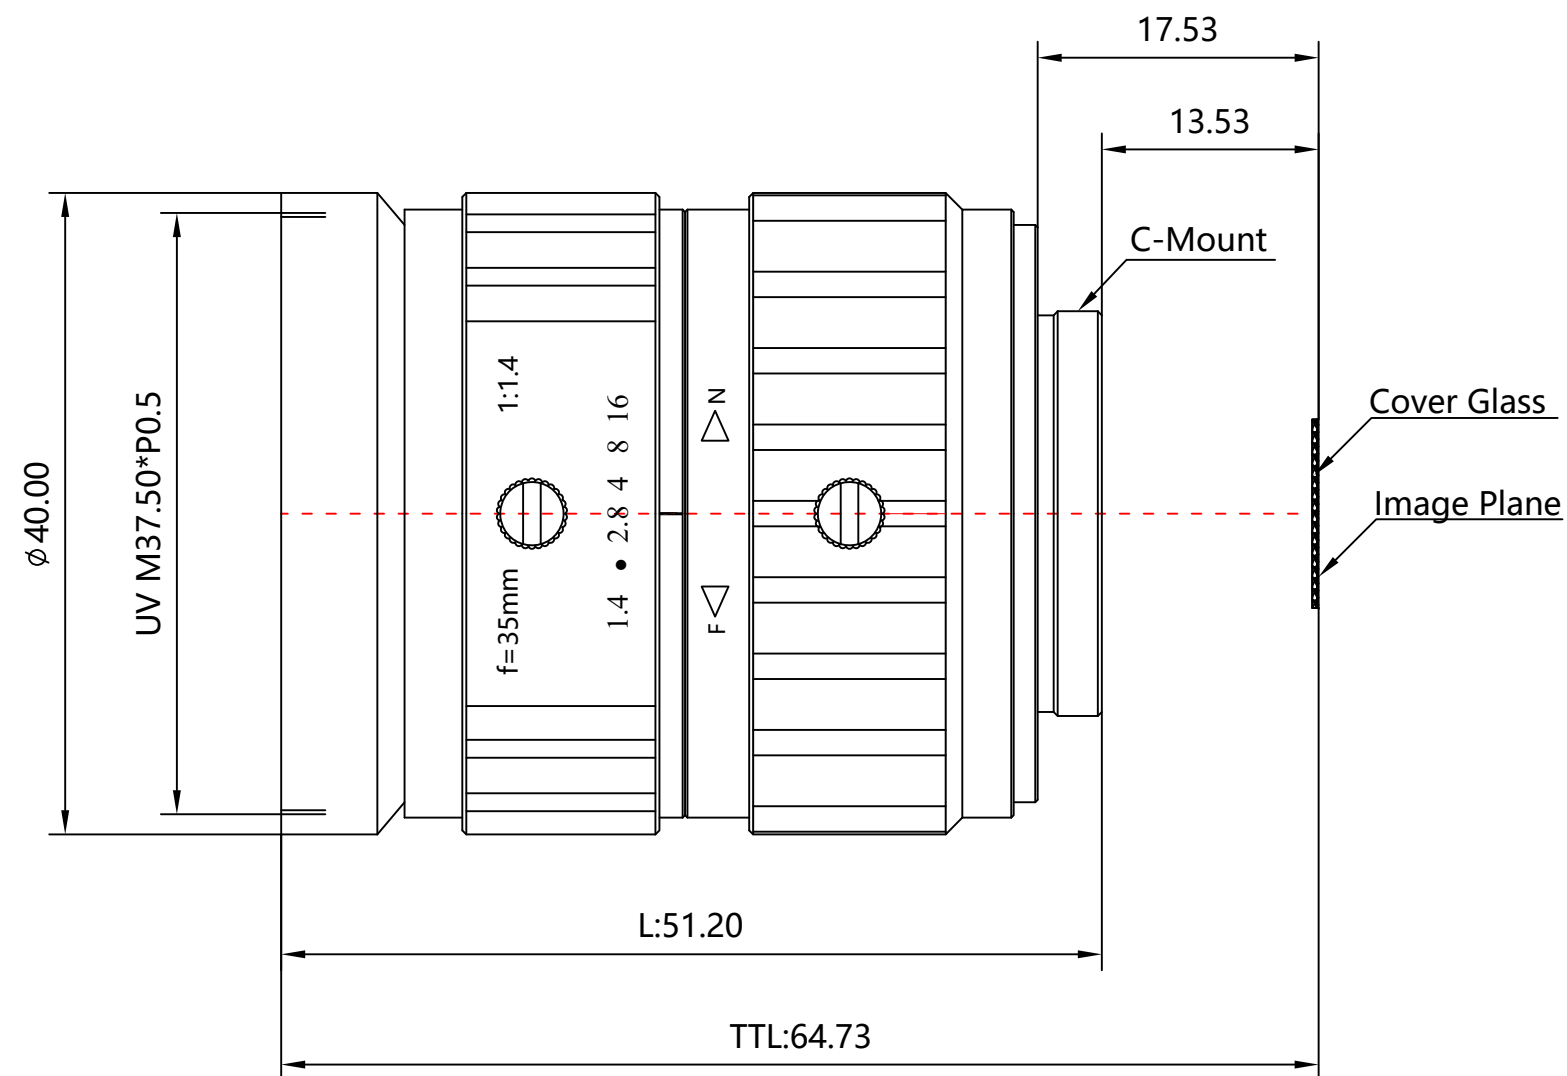


1	Type	Machine Vision
2	EFL	35mm
3	F.NO	F1.4~F16
4	Resolution	MP
5	Image Format	1"
6	FFL (M)	13.53
7	BFL (O)	17.53
8	F.O.V (H*V*D)	1" H19.44°*V14.7°*D24°
9		2/3" H13.5°*V10.2°*D16.8°
10		1/2" H9.9°*V7.4°*D12.3°
10		1/3" H7.4°*V5.6°*D9.2°
11	TV Distortion	<-0.1%
12	M.O.D	0.3m~∞
13	Mount Type	C/CS
14	Dimension Figure	φ40.00*L51.20mm
15	Filter Size	UV M37.5*P0.5
16	Weight	140.7g



17	Iris Operation	Manual	Scale	Remark	Tolerances	Date	REVISED		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
18	Zoom Operation	Fixed		X	±0.3	2019-06-02	CH612A Rev1.0		
19	Focus Operation	Manual	1.5 : 1	X.0	±0.2				
20	Operating Temperature	-20° ~ +85°	Units	X.00	±0.1	Design	Linda	2017-03-07	 3D Angle Projection
				X.000	±0.05	Checked	Anna	2017-05-28	
21	Storage Temperature	-20° ~ +85°	mm	Angle	±0.5°	Approval	Sanmu	2017-05-30	