


1	Type	Machine Vision Lens			
2	Resolution	25MP			
3	Image Format	1.1"			
4	Image Circle	Ø18.0mm			
5	EFL	8mm			
6	F/No.	F2.8-22			
7	FFL	17.53mm			
8	BFL	13.29mm			
9	For Sensor	1.1" 14.13x10.35mm	1" 11.2x11.26mm	2/3" 8.4x7.1mm	
10	F.O.V	Horizontal	82.8°	70.35°	55.2°
11		Vertical	65.8°	70.35°	47.5°
12		Diagonal	94.4°	89.55°	69.1°
13	TV Distortion	<3.2%	<3.2%	<3.2%	
14	Filter Screw Size	M82*P0.75			
15	M.O.D	0.3m~∞			
16	Mount Type	C-Mount			
17	Dimension	Ø84.0*73.01mm			
18	Lens Structure	---			
19	Weight	---			
20	Iris Operation	Manual			
21	Zoom Operation	Fixed			
22	Focus Operation	Manual			
23	Operating Temperature	-20°C~+85°C			
24	Storage Temperature	-20°C ~+85°C			



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2024-04-07	CH663B Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2024-01-02	
	X.000	±0.001	Checked	Anna	2024-02-01	
mm	Angle	±0.5°	Approval	Sanmu	2024-03-18	

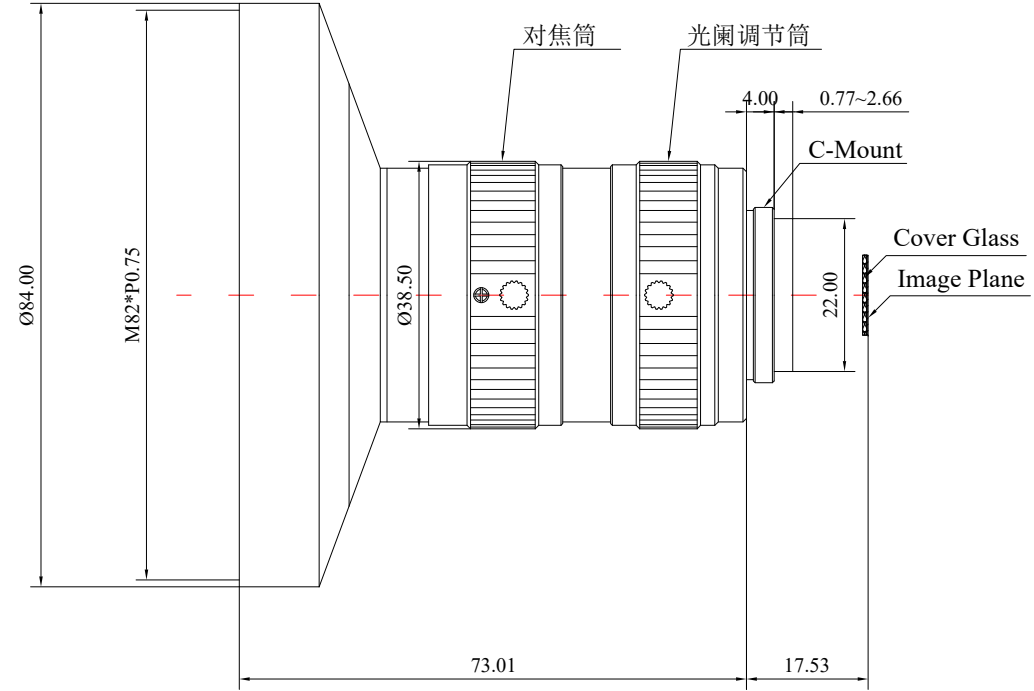