
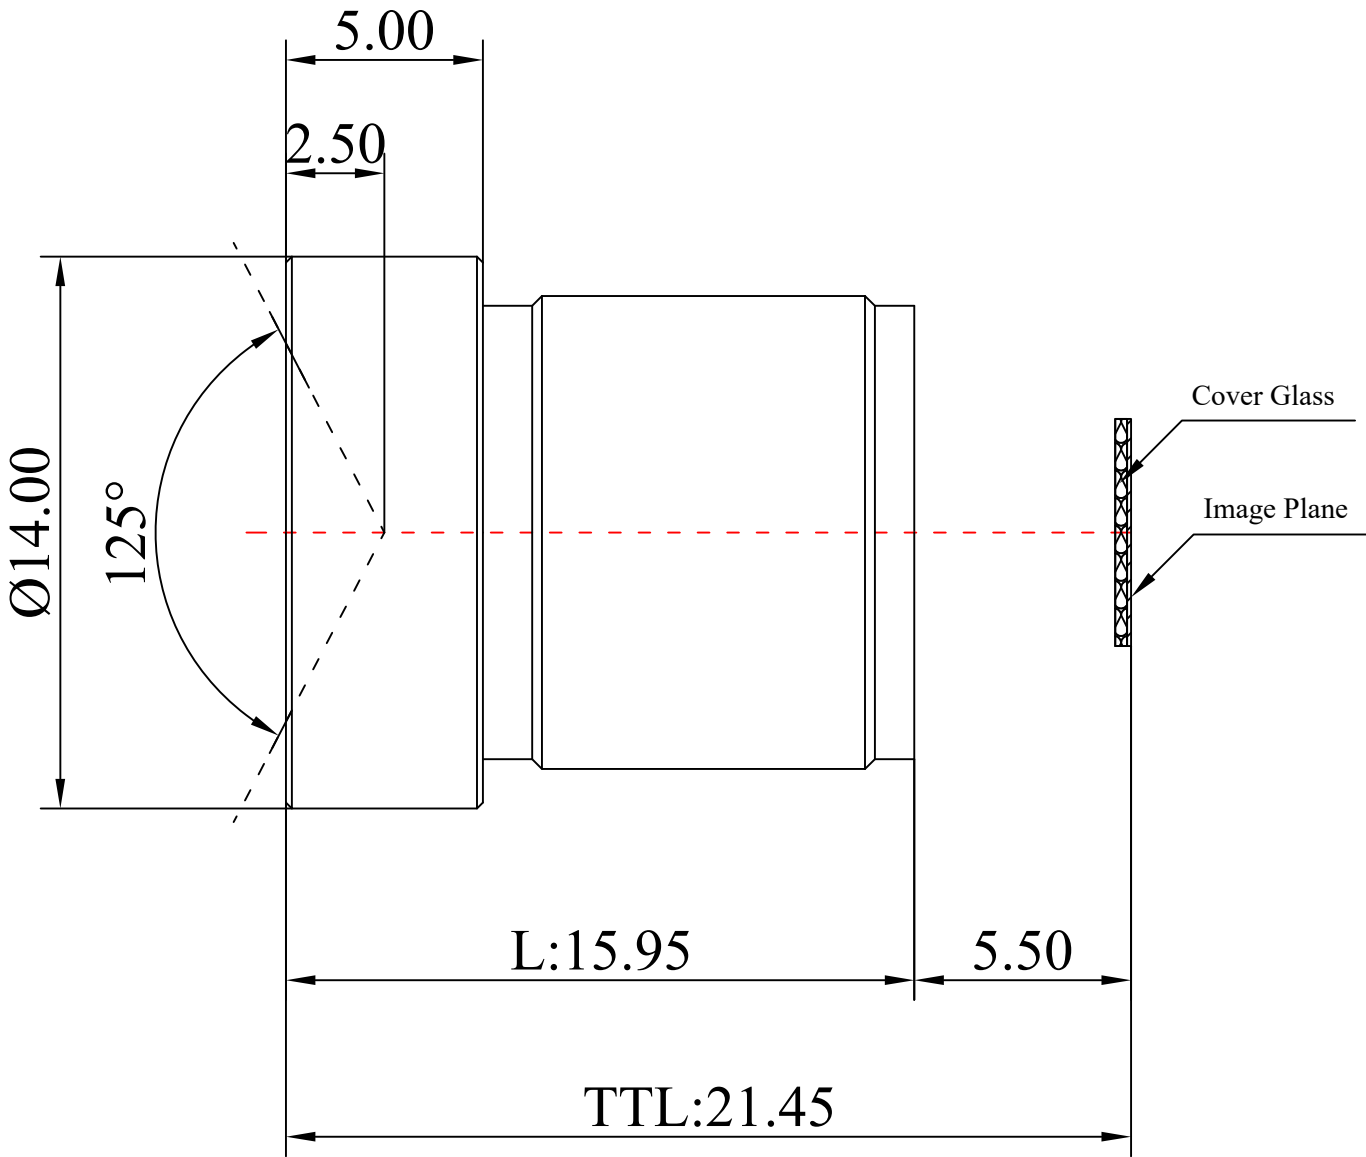


1	Type		M12 Lens
2	Resolution		MP
3	Image Format		1/2.7"
4	Image Circle		φ7.2mm(MAX)
5	EFL		3.6mm
6	TTL		21.45mm
7	F/NO.		F2.2
8	FFL (M)		5.5mm
9	BFL (O)		5.95mm
10	For Sensor		IMX307
11	F.O.V	Horizontal	86°
12		Vertical	50°
13		Diagonal	125°
14	TV Distortion		<-15%
15	Relative Ill.		>50%
16	Chief Ray Angle		<15.0°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ14.0*L15.95mm
20	Lens Structure		4G
21	IR-Filter		Non-IR
22	Waterproof		No
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-15° ~+65°
28	Storage Temperature		-15° ~+65°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2017-10-14	CH816A Rev1.0		
	4:1	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2017-05-10	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2017-06-08	
mm	Angle	±0.5°	Approval	Sanmu	2017-06-13	