
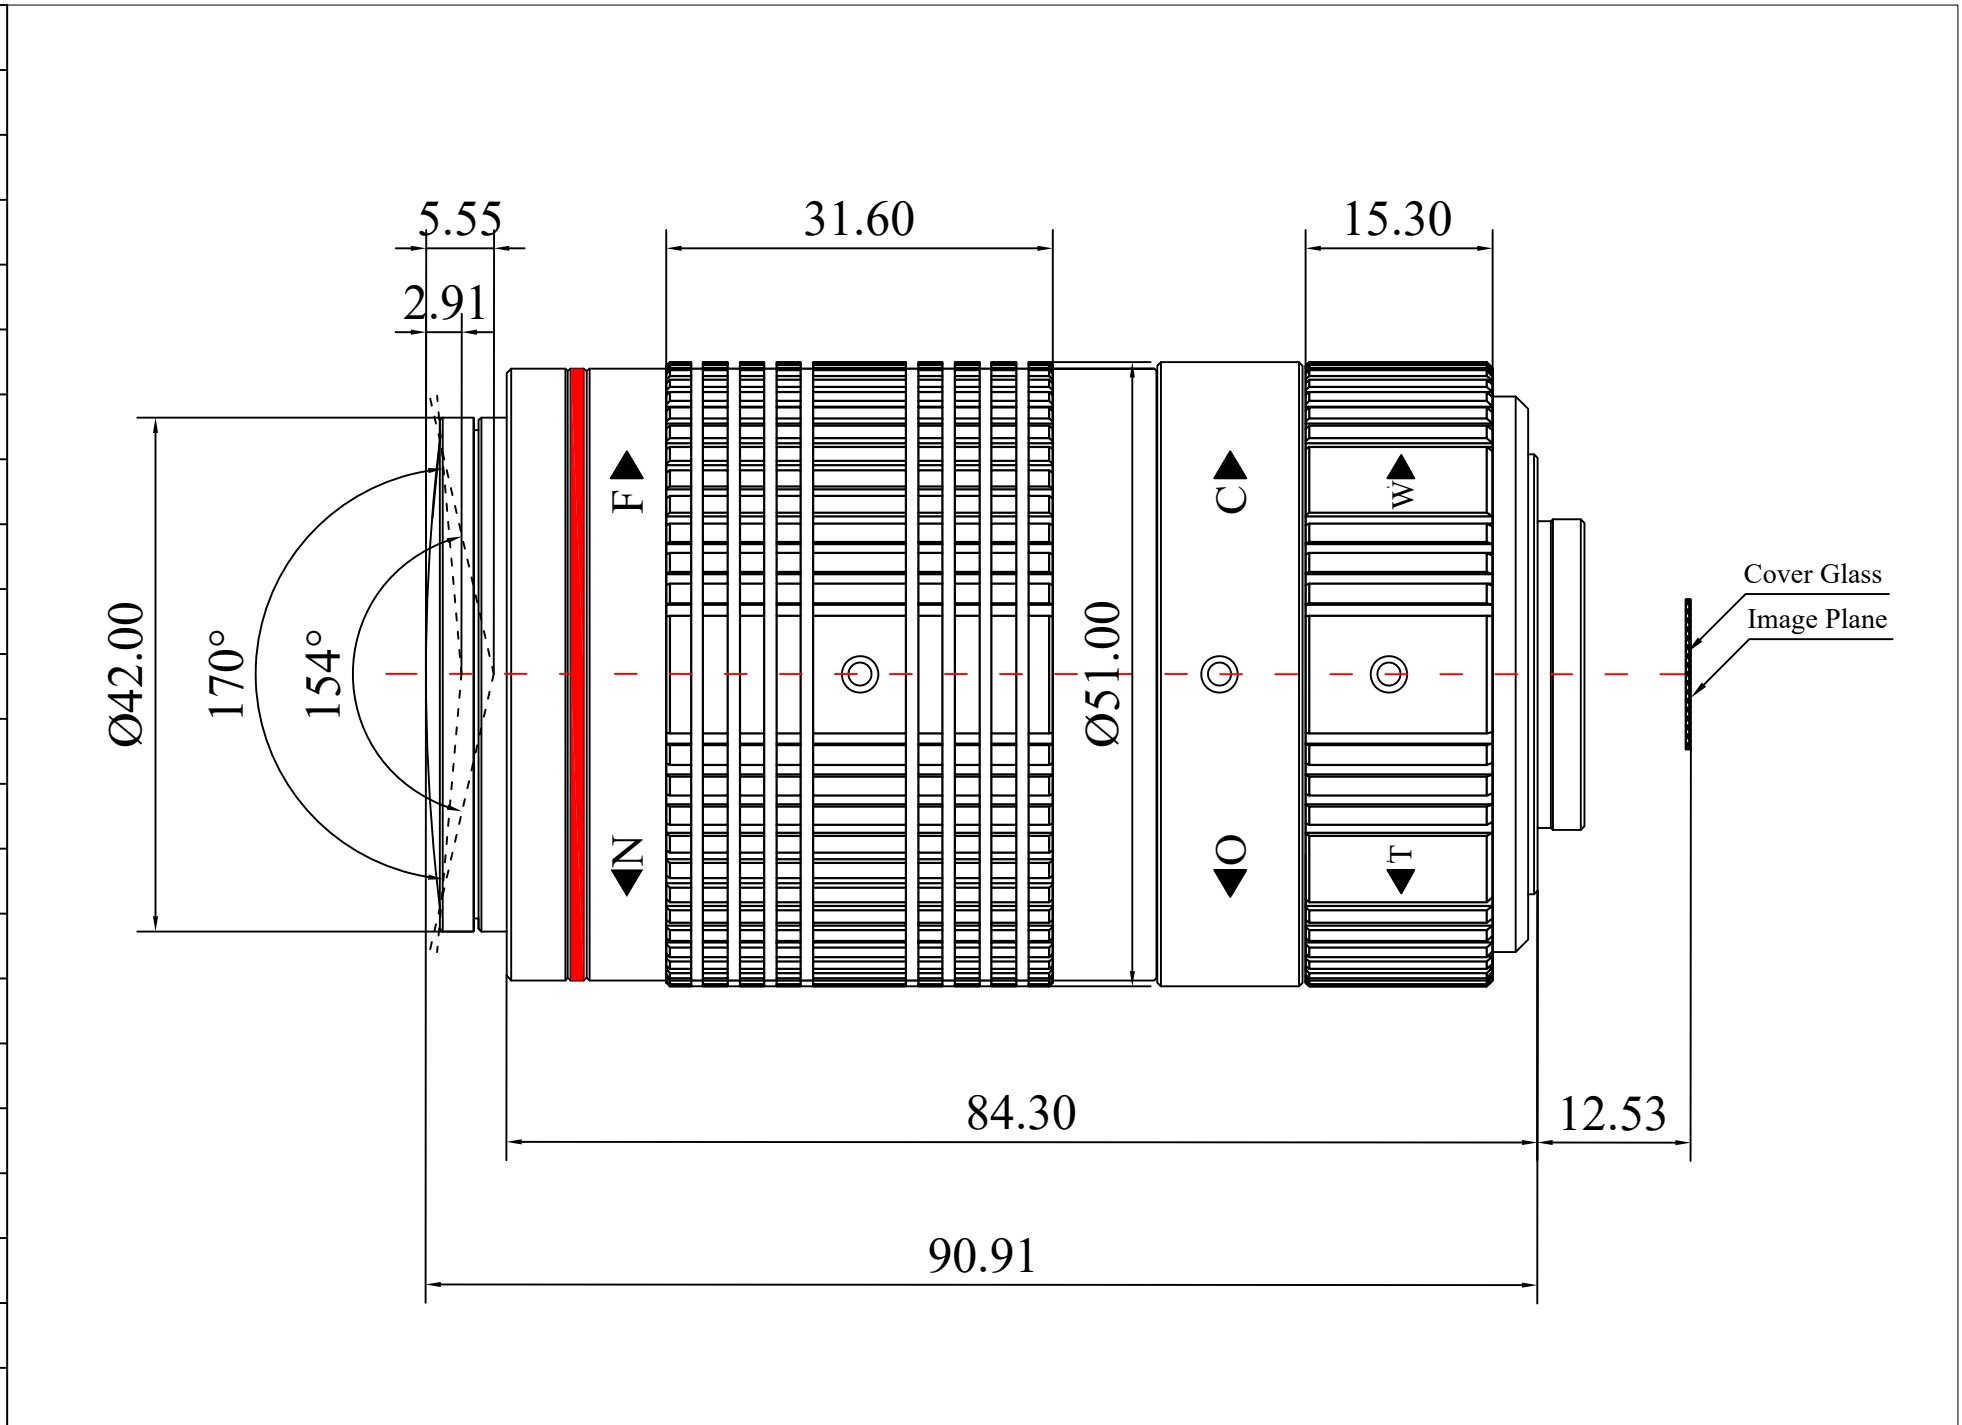


1	Type	Vari-Focal Lens
2	Image Format	1/1.7"
3	Image Circle	Ø9.5(Max)
4	Optical EFL	3.6-18mm(In Air)
5	Aperture	1.6 (W)
6	Resolution	12MP
7	System TTL	103.44mm
8	For Sensor	16:9 W-T 1/1.7" 1/1.8"
9	F.O.V	H 128°~30.5° 120°~29.2°
10		V 63°~17.1° 61°~16.4°
11		D 170°~35° 154°~33.6°
12	C.R.A	13.2°(W)~9.7°(T)
13	Illumination	45%(W)~77.0%(T)
14	Distortion	-75.67%(W)~-2.69%(T)
15	Optical BFL	9.2(W)~20.42(T)
16	Mechanical BFL	8.7(W)~19.92(T)
17	Dimension Figure	Ø51.00*84.30mm
18	Mount Type	CS
19	IR Correction	Yes
20	Element	---
21	Wavelength	430-650&850
22	M.O.D	0.5m(W)~1.5m(T)
23	Weight	---
24	Iris Operation	Manual
25	Zoom Operation	Manual
26	Focus Operation	Manual
27	Operating Temperature	-20° ~ +85°
28	Storage Temperature	-20° ~+85°

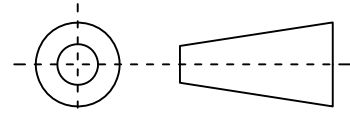

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2022-01-10	CH936C Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2019-05-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2019-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2019-07-20	