


1	Type	Wide Angle Lens	
2	Resolution	MP	
3	Image Format	1/2.3"	
4	Image Circle	φ8.0mm(MAX)	
5	EFL	2.7mm	
6	TTL	24.15mm	
7	F/NO.	2.5	
8	FFL (M)	4.03mm	
9	BFL (O)	6.26mm	
10	For Sensor	1/2.3"	1/3"
11	F.O.V	Horizontal	120.4°
12		Vertical	93.5°
13		Diagonal	156°
14	TV Distortion	<-18.4%	<-10.7%
15	Relative Ill.	>65.7%	>80.7%
16	Chief Ray Angle	<9.7°	<7.3°
17	M.O.D	0.1m~∞	
18	Mount Type	M12*P0.5	
19	Dimension Figure	φ18.00*L20.12mm	
20	Lens Structure	4G+2ASP	
21	IR-Filter	T=50% & 650±10nm	
22	Waterproof	No	
23	Weight	7.6g	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-20° ~+85°	
28	Storage Temperature	-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2019-07-09	CH1105A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2016-02-02	
	X.000	±0.001	Checked	Anna	2016-05-03	
mm	Angle	±0.5°	Approval	Sanmu	2019-05-08	

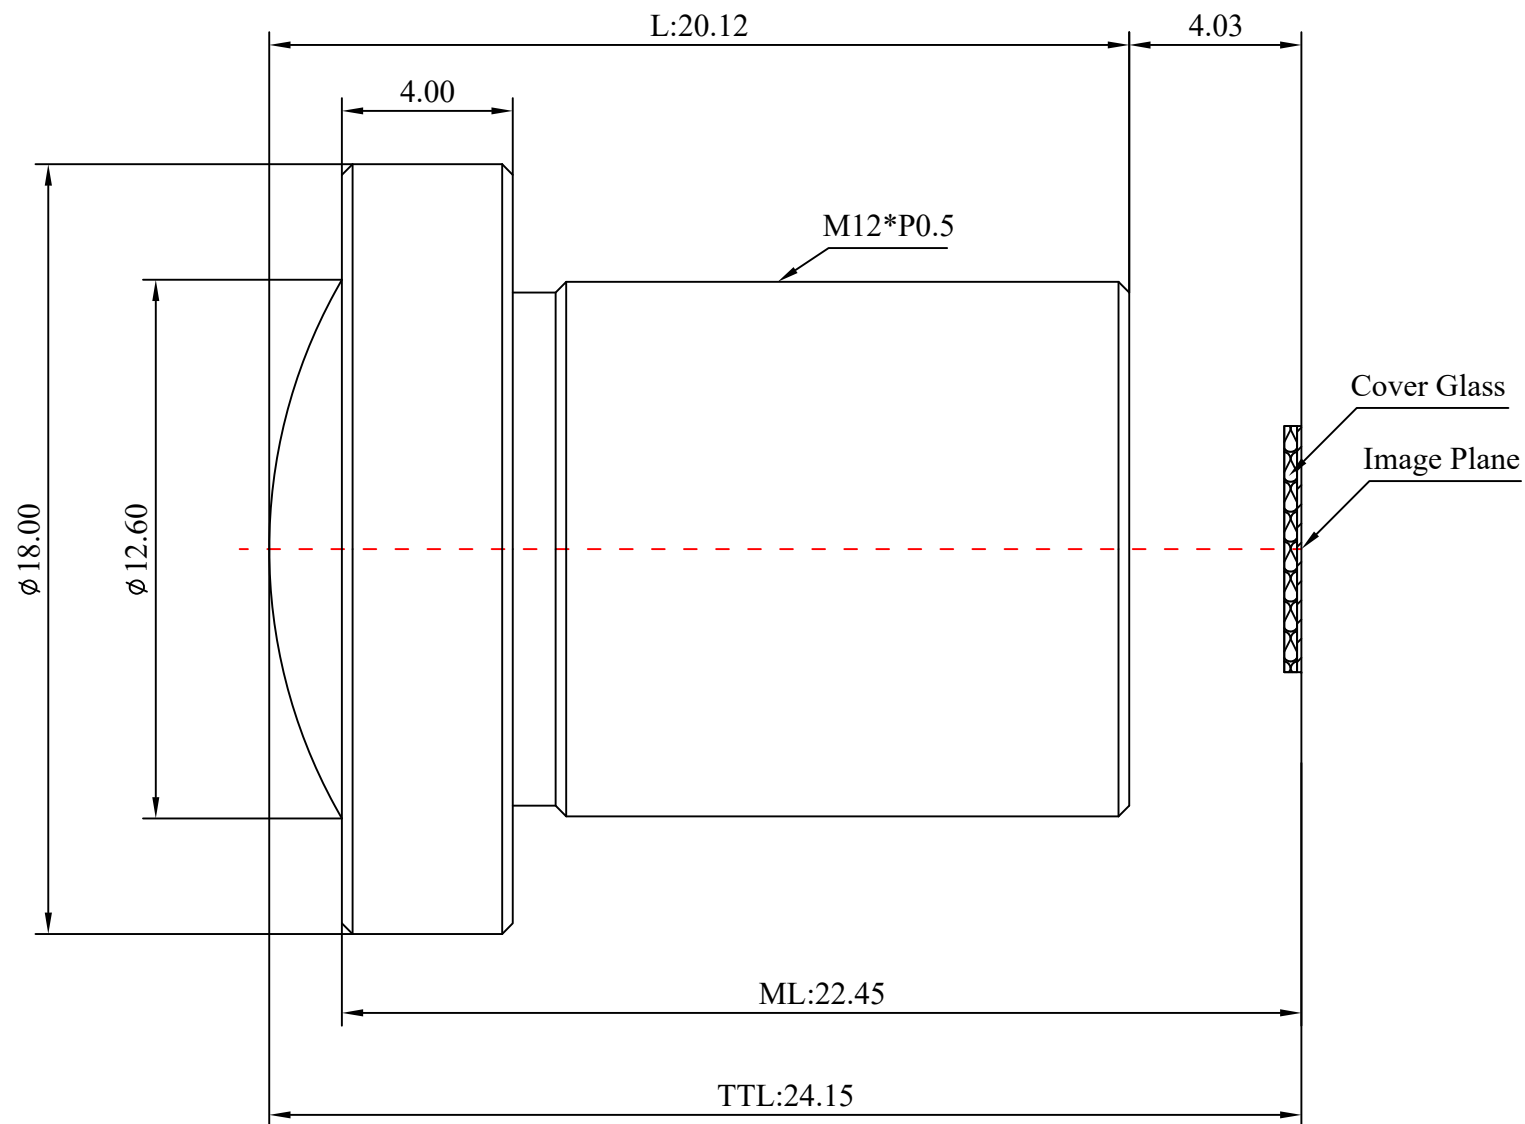