
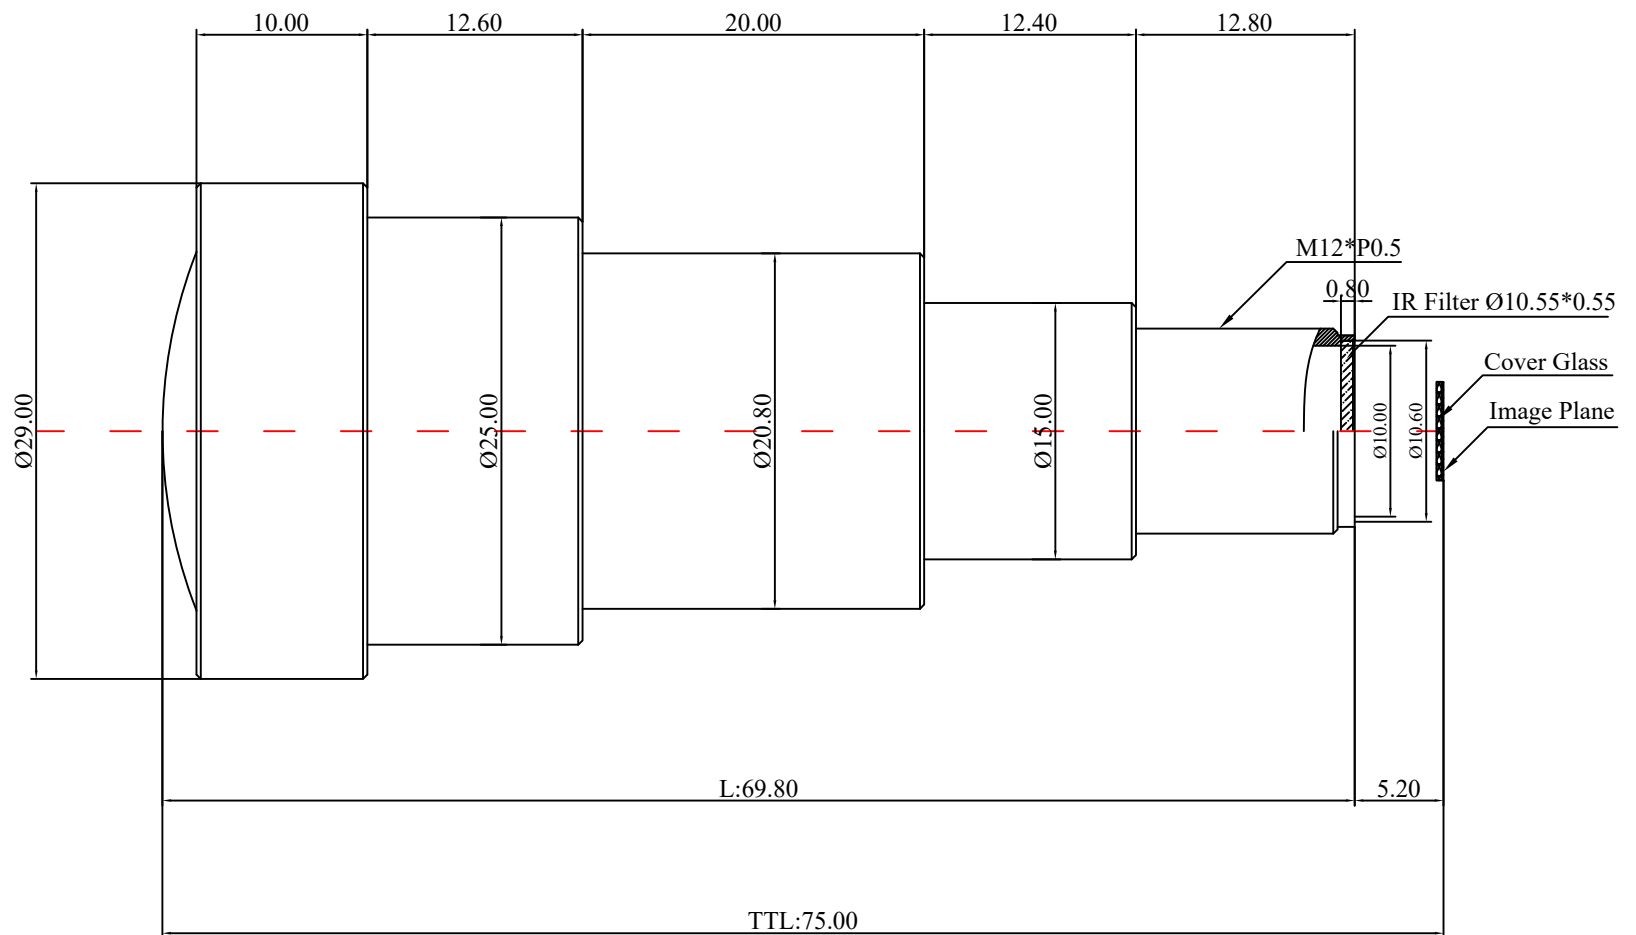


1	Type	M12 Lens		
2	Resolution	8MP		
3	Image Format	1/1.8"		
4	Image Circle	φ9.2mm(MAX)		
5	EFL	70mm		
6	TTL	75mm		
7	F/NO.	F3.5		
8	FFL (M)	7.2mm		
9	BFL (O)	23.1mm		
10	For Sensor	IMX334	IMX477	
11	F.O.V	Horizontal	6.25°	5.0°
12		Vertical	3.53°	4.0°
13		Diagonal	7.19°	6.38°
14	OPT Distortion	<-1%		
15	Relative Ill.	>85%		
16	Chief Ray Angle	<6°		
17	M.O.D	0.5m~∞		
18	Mount Type	M12*P0.5		
19	Dimension Figure	φ29.00*L67.8mm		
20	Lens Structure	9G		
21	IR-Filter	T=50%&IR650±10nm		
22	Waterproof	No		
23	Weight	49g		
24	Iris Operation	Fixed		
25	Zoom Operation	Fixed		
26	Focus Operation	Manual		
27	Operating Temperature	-25° ~+85°		
28	Storage Temperature	-25° ~+85°		

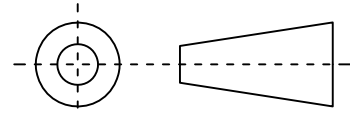

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2022-03-18	CH8041AB Rev1.1		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2022-02-16	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2022-02-21	
mm	Angle	±0.5°	Approval	Sanmu	2022-02-26	