
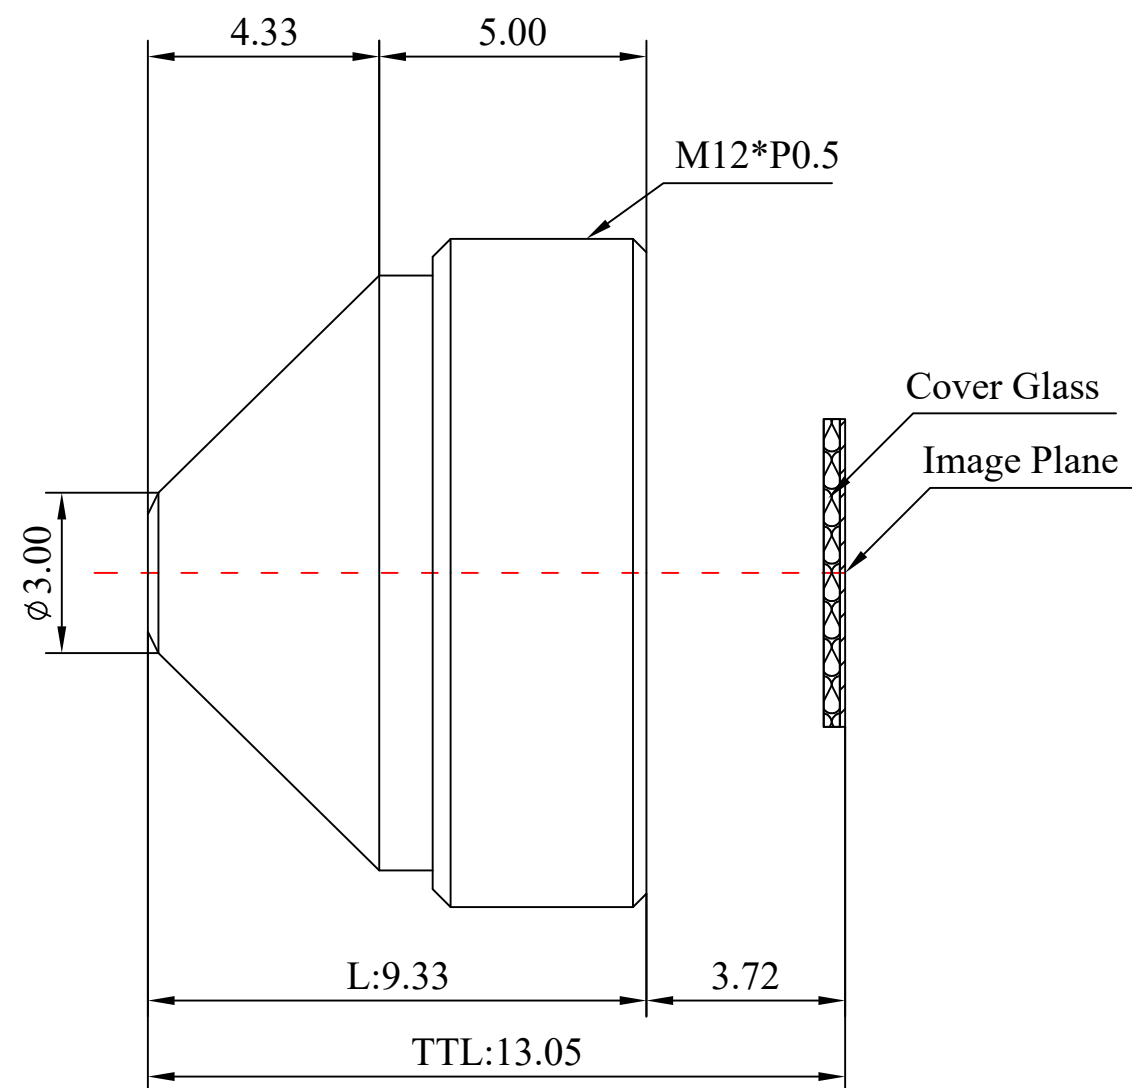


1	Type	Pinhole Lens	
2	Resolution	MP	
3	Image Format	1/2.7"&1/3"	
4	Image Circle	φ6.7mm(MAX)	
5	EFL	4.3mm	
6	TTL	13.05mm	
7	F/NO.	2.5	
8	FFL (M)	3.72mm	
9	BFL (O)	4.55mm	
10	For Sensor	1/2.7"&1/3"	
11	F.O.V	Horizontal	75°
12		Vertical	56°
13		Diagonal	93°
14	TV Distortion	<-1%	
15	Relative Ill.	>65.5%	
16	Chief Ray Angle	<8.6°	
17	M.O.D	0.1m~∞	
18	Mount Type	M12*P0.5	
19	Dimension Figure	M12.00*L9.33mm	
20	Lens Structure	6G	
21	IR-Filter	T=50%&IR650±10nm	
22	Weight	1.8g	
23	Iris Operation	Fixed	
24	Zoom Operation	Fixed	
25	Focus Operation	Manual	
26	Operating Temperature	-20° ~+85°	
27	Storage Temperature	-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
5: 1	X	± 0.2	2019-05-11	CH1922B Rev1.0		
	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2015-01-15	
	X.000	± 0.001	Checked	Anna	2015-01-16	
mm	Angle	± 0.5°	Approval	Sanmu	2015-01-16	


**3D Angle Projection**