
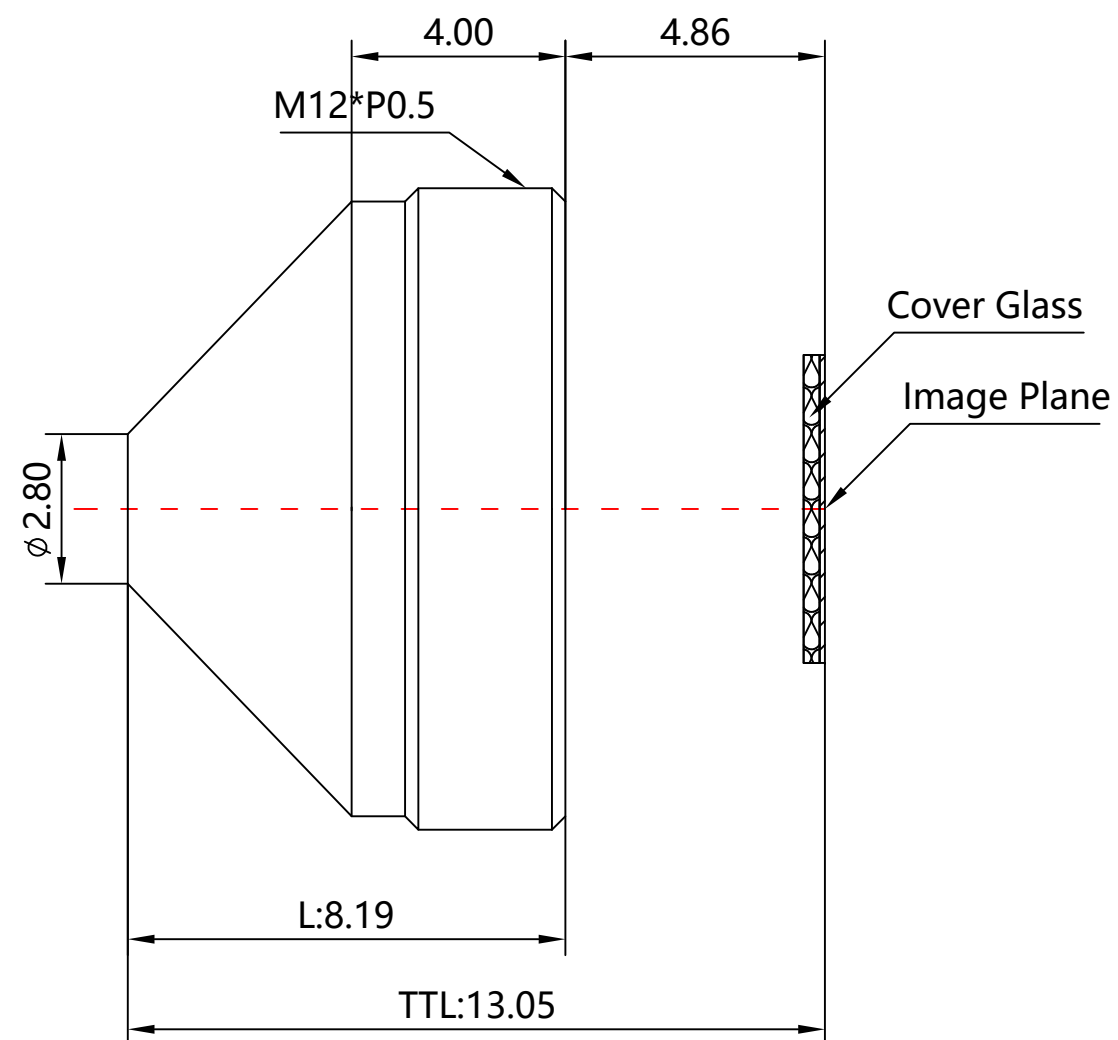


1	Type	Pinhole Lens
2	Resolution	MP
3	Image Format	1/3"
4	Image Circle	φ6.0mm(MAX)
5	EFL	2.8mm
6	TTL	13.05mm
7	F/NO.	2.5
8	FFL (M)	4.86mm
9	BFL (O)	5.97mm
10	For Sensor	1/3"
11	F.O.V	Horizontal 90°
12		Vertical 62°
13		Diagonal 120°
14	TV Distortion	<-20%
15	Relative Ill.	>60%
16	Chief Ray Angle	<13°
17	M.O.D	0.1m~∞
18	Mount Type	M12*P0.5
19	Dimension Figure	φ12.00*L8.19mm
20	Lens Structure	4G
21	IR-Filter	T=50%&IR650±10nm
22	Weight	3.5g
23	Iris Operation	Fixed
24	Zoom Operation	Fixed
25	Focus Operation	Manual
26	Operating Temperature	-20° ~+85°
27	Storage Temperature	-20° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
5: 1	X	± 0.1	2019-05-12	CH1936PA Rev1.0		
	X.0	± 0.05				
Units	X.00	± 0.03	Design	Linda	2017-01-05	 3D Angle Projection
	X.000	± 0.001	Checked	Anna	2017-03-13	
mm	Angle	± 0.5°	Approval	Sanmu	2017-03-19	