
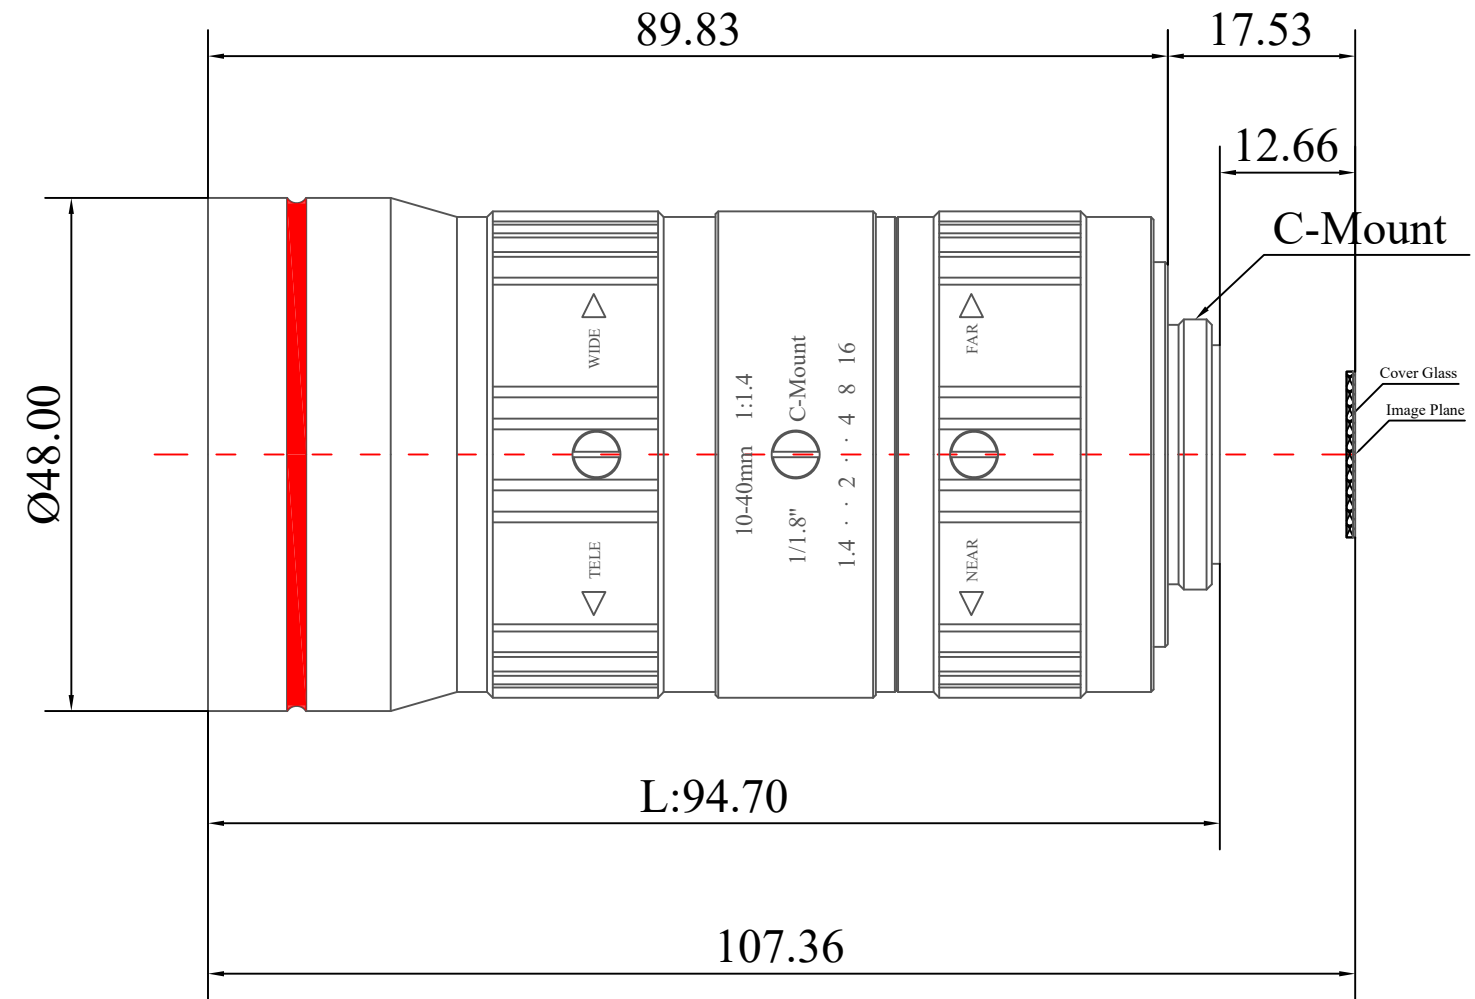


| | | |
|----|-----------------------|--------------------|
| 1 | Type | Vari-focal Lens |
| 2 | Resolution | MP |
| 3 | Image Format | 7.2*5.32*5.98mm |
| 4 | Image Circle | φ9.0mm(MAX) |
| 5 | EFL | 10-40mm |
| 6 | TTL | 107.36mm |
| 7 | F/NO. | F1.4(ALL) |
| 8 | FFL (M) | 12.66mm |
| 9 | BFL (O) | 17.53mm |
| 10 | For Sensor | 1/1.8" |
| 11 | F.O.V | Diagonal 48°-14° |
| 12 | | Horizontal 38°-12° |
| 13 | | Vertical 28°-8° |
| 14 | TV Distortion | -10.21%-0.17% |
| 15 | Relative Ill. | >70% |
| 16 | Chief Ray Angle | <12° |
| 17 | M.O.D | 0.3m~∞ |
| 18 | Mount Type | C/CS |
| 19 | Dimension Figure | φ48.0*L94.7mm |
| 20 | Lens Structure | 14G All Glass |
| 21 | IR-Filter | Non-IR |
| 22 | Weight | 288.2g |
| 23 | Iris Operation | Manual |
| 24 | Zoom Operation | Manual |
| 25 | Focus Operation | Manual |
| 26 | Operating Temperature | -20° ~+85° |
| 27 | Storage Temperature | -20° ~+85° |



| Scale | Remark | Tolerances | Date | Revised | | 福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD |
|-------|--------|------------|------------|----------------|------------|--|
| 4: 1 | X | ± 0.2 | 2019-08-14 | CH3583C Rev1.0 | | |
| | X.0 | ± 0.15 | | | | |
| Units | X.00 | ± 0.10 | Design | Linda | 2019-06-03 |  3D Angle Projection |
| | X.000 | ± 0.001 | Checked | Anna | 2019-06-18 | |
| mm | Angle | ± 0.5° | Approval | Sanmu | 2019-08-10 | |