


1	Type	Wide Angle Lens			
2	Resolution	6MP			
3	Image Format	1/2.8"			
4	Image Circle	φ6.9mm(MAX)			
5	EFL	2.6mm			
6	TTL	16.77mm			
7	F/NO.	2.0			
8	FFL (M)	2.94mm			
9	BFL (O)	3.70mm			
10	For Sensor	IMX335	IMX307	IMX415	
11	F.O.V	Horizontal	124°	138°	137°
12		Vertical	89°	70°	70°
13		Diagonal	172.2°	168°	168°
14	OPT Distortion	<-88%			
15	Relative Ill.	>60%			
16	Chief Ray Angle	<10°			
17	M.O.D	0.1m~∞			
18	Mount Type	M12*P0.5			
19	Dimension Figure	φ14.00*L14.33mm			
20	Lens Structure	6G			
21	IR-Filter	T=50%&IR650±10nm			
22	Waterproof	No			
23	Weight	---			
24	Iris Operation	Fixed			
25	Zoom Operation	Fixed			
26	Focus Operation	Manual			
27	Operating Temperature	-20° ~+85°			
28	Storage Temperature	-20° ~+85°			



Scale	Remark	Tolerances	Date	Revised	
4:1	X	±0.2	2021-06-09	CH3716CB Rev1.0	
	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2020-03-26
	X.000	±0.001	Checked	Anna	2020-04-20
mm	Angle	±0.5°	Approval	Sanmu	2020-05-13

福州创安光电科技有限公司
 FUZHOU CHUANGAN OPTICS CO., LTD

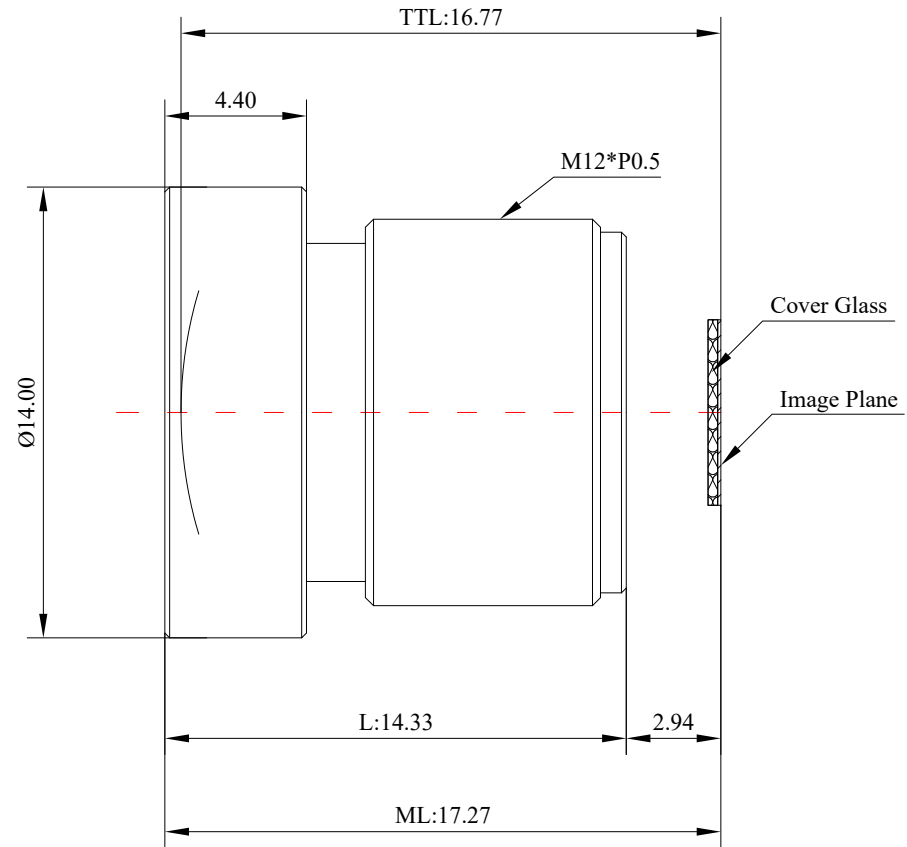