
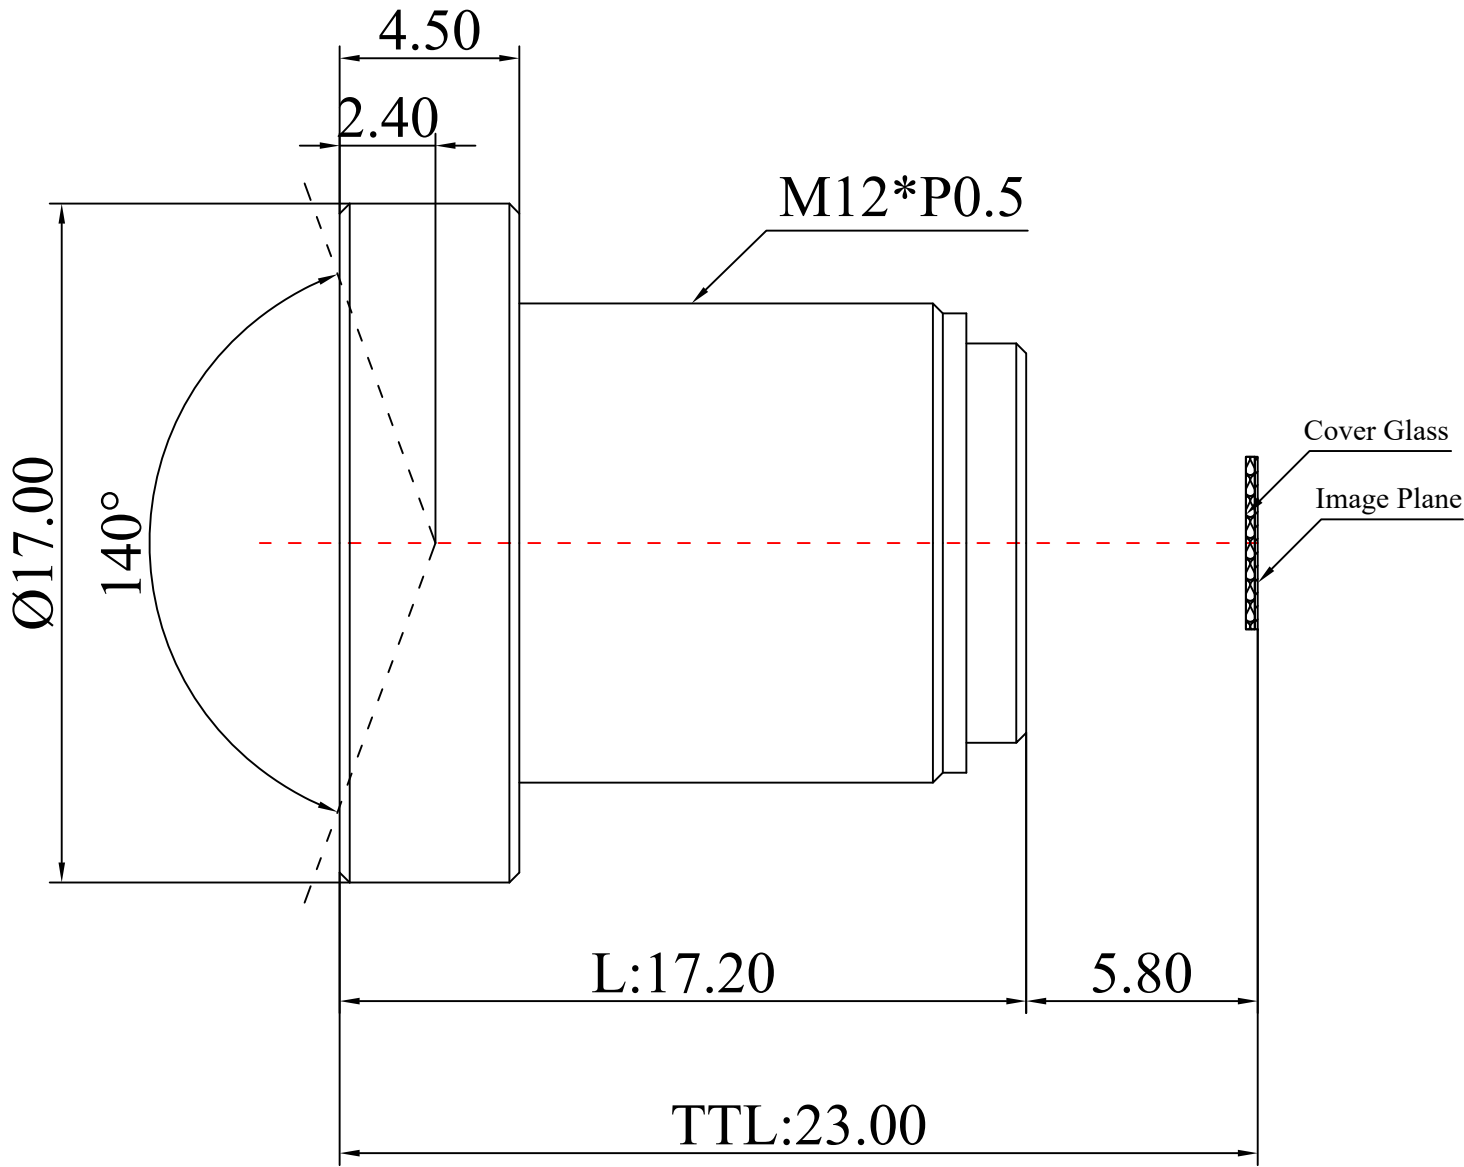


1	Type		Board Lens
2	Resolution		5MP
3	Image Format		1/1.8"
4	Image Circle		φ8.2mm(MAX)
5	EFL		4.25mm
6	TTL		23.00mm
7	F/NO.		F2.0
8	FFL (M)		5.80mm
9	BFL (O)		6.20mm
10	For Sensor		1/1.8"
11	F.O.V	Horizontal	120°
12		Vertical	60°
13		Diagonal	140°
14	OPT Distortion		<-40.0%
15	Relative Ill.		>60%
16	Chief Ray Angle		<16°
17	M.O.D		0.1m~∞
18	Mount Type		M12*P0.5
19	Dimension Figure		φ17.00*L17.20mm
20	Lens Structure		6G
21	IR-Filter		Non-IR
22	Waterproof		---
23	Weight		---
24	Iris Operation		Fixed
25	Zoom Operation		Fixed
26	Focus Operation		Manual
27	Operating Temperature		-25° ~+85°
28	Storage Temperature		-25° ~+85°



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
	X	±0.2	2010-10-11	CH3758A Rev1.0		
4:1	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2010-08-21	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2010-08-26	
mm	Angle	±0.5°	Approval	Sanmu	2010-09-23	