



1	Type	Machine Vision Lens	
2	EFL	5mm	
3	F.NO	F1.6-16	
4	Resolution	150lp/mm(5MP)	
5	Image Format	2/3"	
6	BFL (M)	13.03	
7	BFL (O)	17.53	
8	F.O.V (H*V)	2/3"	82.7°*66.85°
9		1/2.5"	70.7°*56.7°
10		1/3"	61.5°*47.45°
11	TV Distortion	<1.5%	
12	M.O.D	0.1m	
13	Mount Type	C/CS	
14	Dimension Figure	φ39.0*L41.5	
15	Filter Size	UV M37.0*P0.5	
16	Weight	96g	

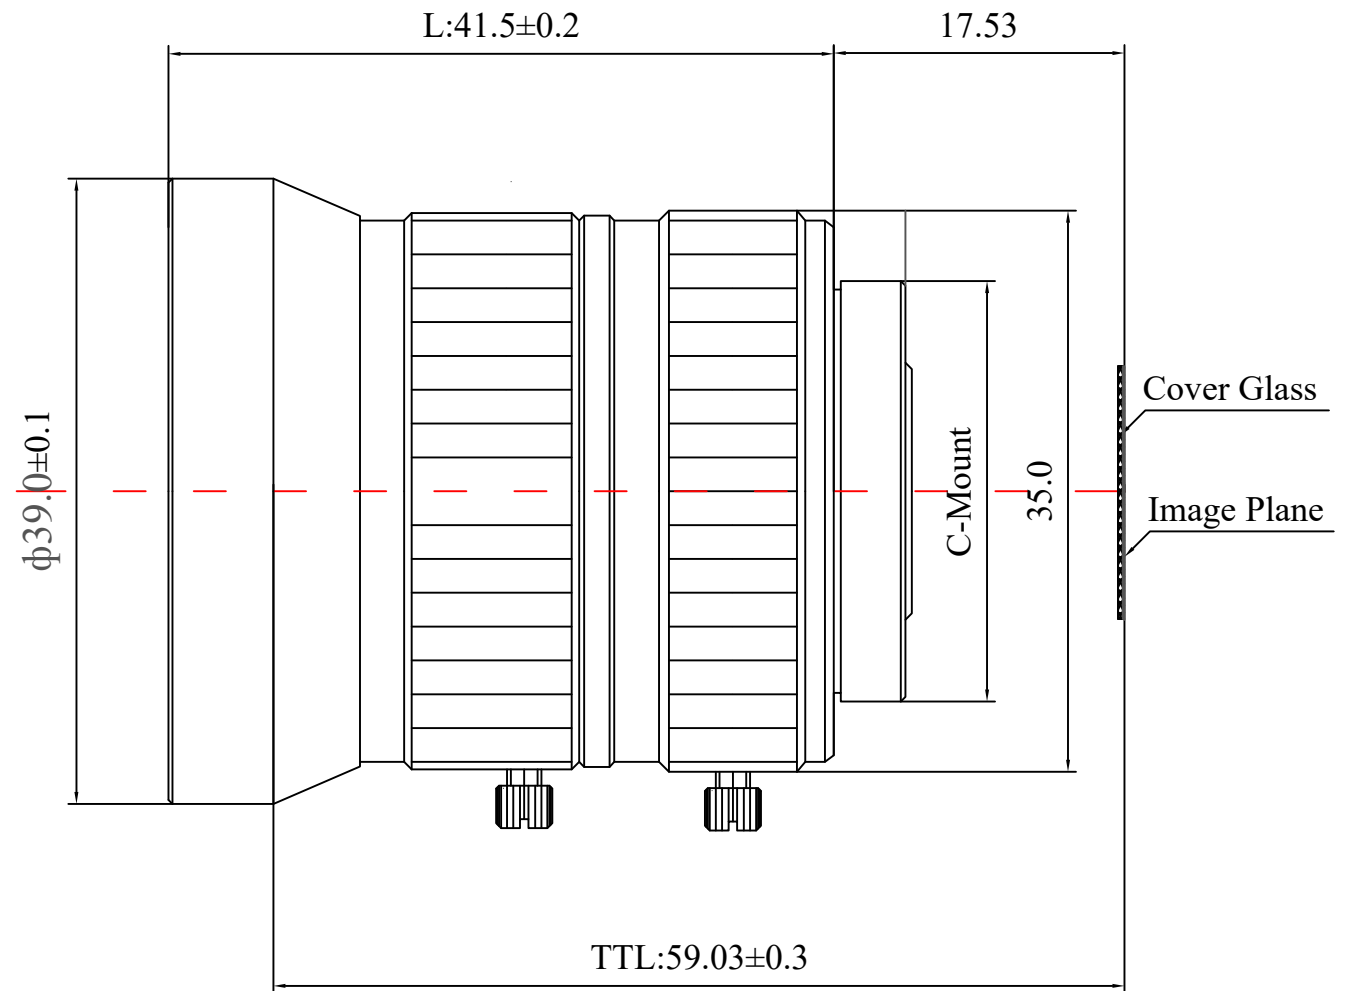

17	Iris Operation	Manual
18	Zoom Operation	Fixed
19	Focus Operation	Manual
20	Operating Temperature	-20° ~ +85°
21	Storage Temperature	-20° ~ +85°

Scale	Remark	Tolerances	Date	Revised	
2: 1	X	± 0.2	2019-05-11	CH619A Rev1.0	
	X.0	± 0.15			
Units	X.00	± 0.10	Design	Linda	2016-10-15
	X.000	± 0.001	Checked	Anna	2016-10-20
mm	Angle	± 0.5°	Approval	Sanmu	2016-10-28

福州创安光电科技有限公司
FUZHOU CHUANGAN OPTICS CO., LTD



3D Angle Projection