


1	Type	Machine Vision Lens		
2	Resolution	25MP		
3	Image Format	1.1"		
4	Image Circle	Ø18.0mm		
5	EFL	50mm		
6	F/No.	F2.8-16		
7	FFL	17.53mm		
8	BFL	11.85mm		
9	For Sensor	1.1"	1"	2/3"
10	F.O.V	Horizontal	16.1°	14.6°
11		Vertical	12.9°	11.7°
12		Diagonal	19.8°	18°
13	TV Distortion	<0.1%	<0.1%	<0.1%
14	Filter Screw Size	M40.5*P0.5		
15	M.O.D	0.3m~∞		
16	Mount Type	C-Mount		
17	Dimension	Ø46.4*59.3mm		
18	Lens Structure	---		
19	Weight	---		
20	Iris Operation	Manual		
21	Zoom Operation	Fixed		
22	Focus Operation	Manual		
23	Operating Temperature	-20°C~+85°C		
24	Storage Temperature	-20°C ~+85°C		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2024-04-07	CH668A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2024-01-02	
mm	X.000	±0.001	Checked	Anna	2024-02-01	
	Angle	±0.5°	Approval	Sanmu	2024-03-18	

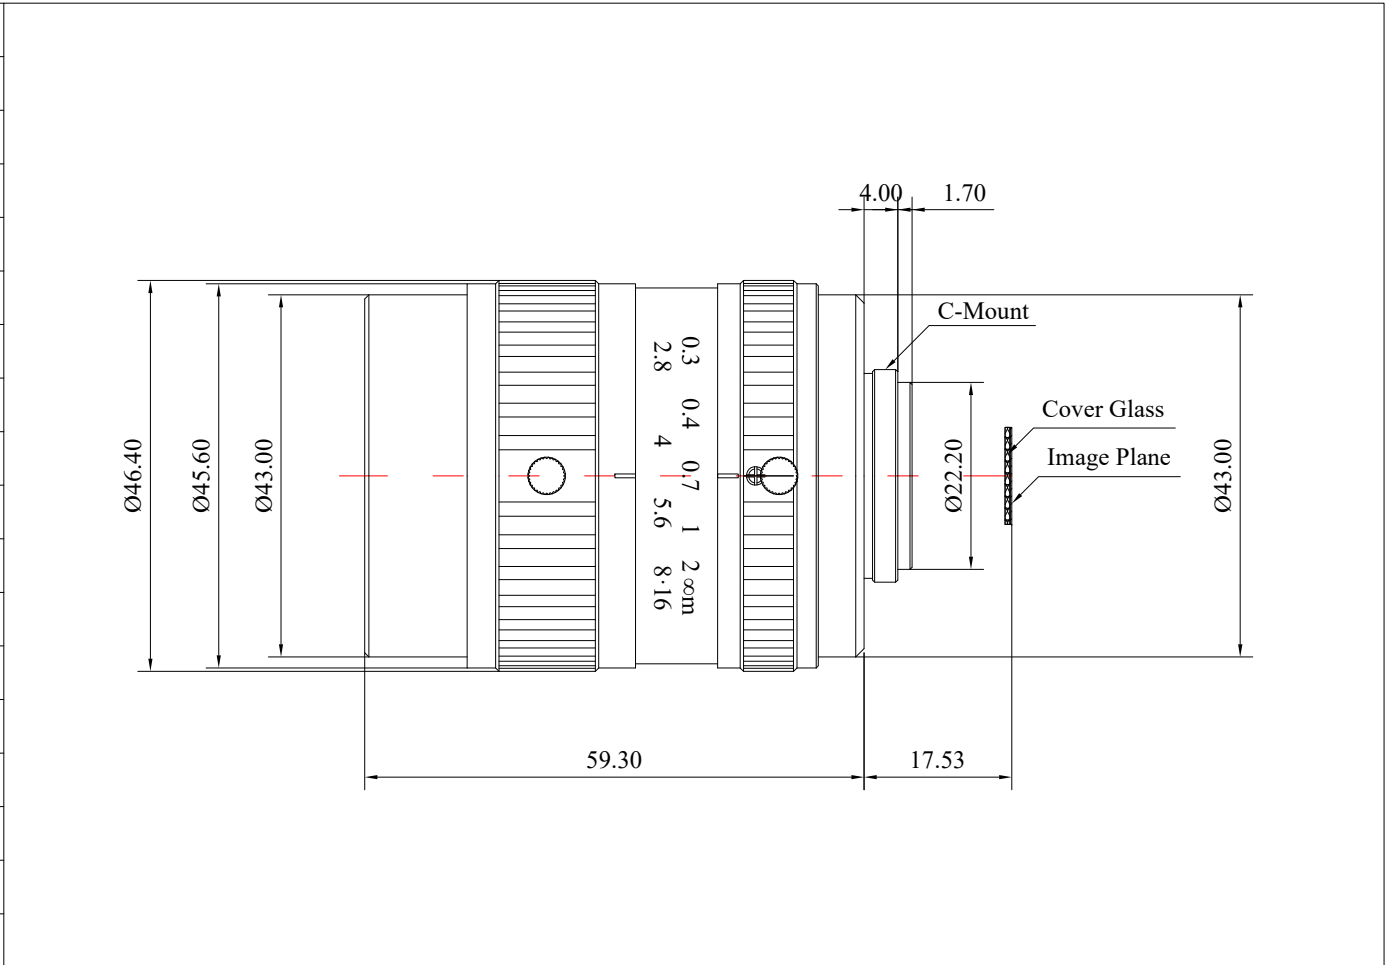